


Reliability Test Data

MVL Series

MVH Series


●105°C Endurance

○ MVL 6.3V 22 μ F D60
△ MVL 50V 4.7 μ F E60
× MVL 16V 47 μ F E60

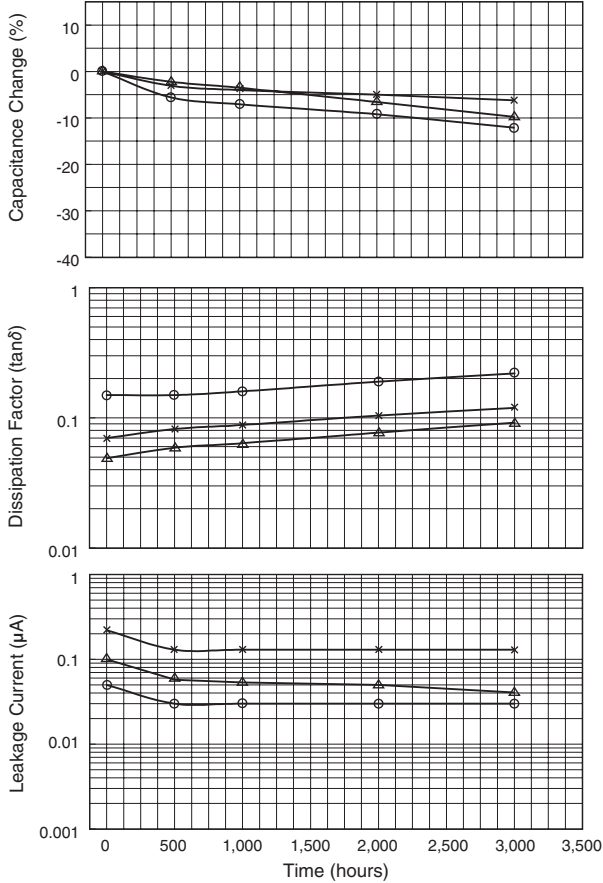



●125°C Endurance

○ MVH 10V 220 μ F HA0
△ MVH 35V 47 μ F HA0
× MVH 50V 33 μ F HA0

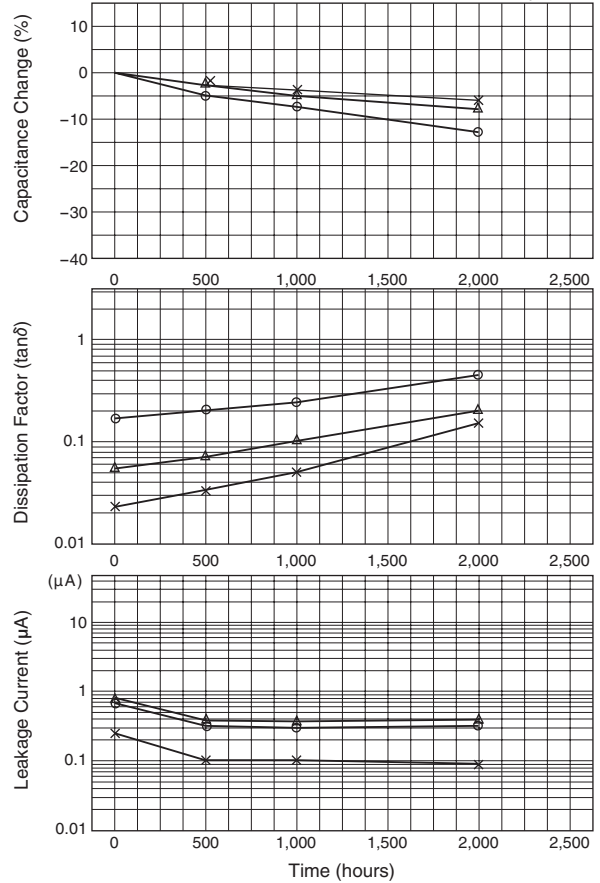

MVY Series




●Impedance/ESR vs Frequency

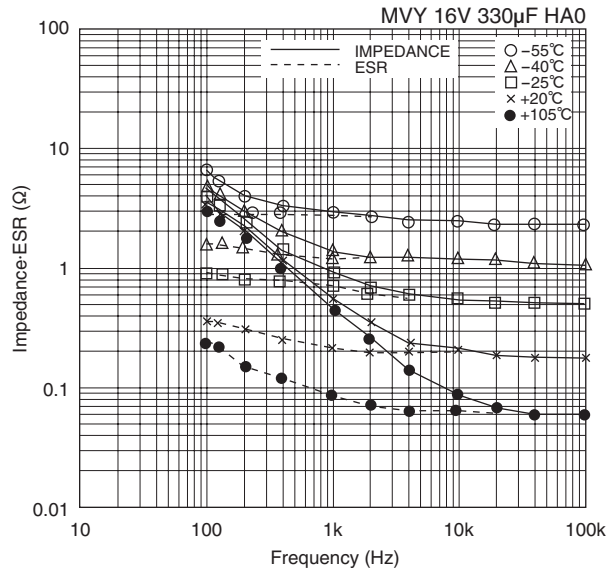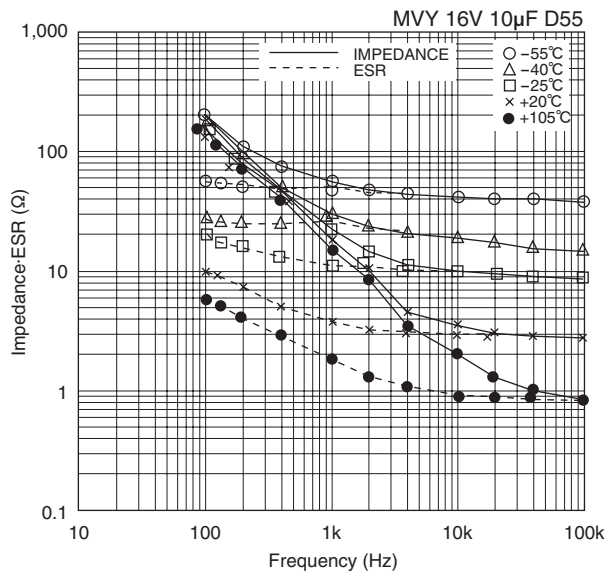

KZE Series




●105°C Endurance with Rated Ripple Current

○KZE 10V 220μF φ6.3×11L
 △KZE 16V 680μF φ10×16L
 □KZE 50V 470μF φ12.5×20L

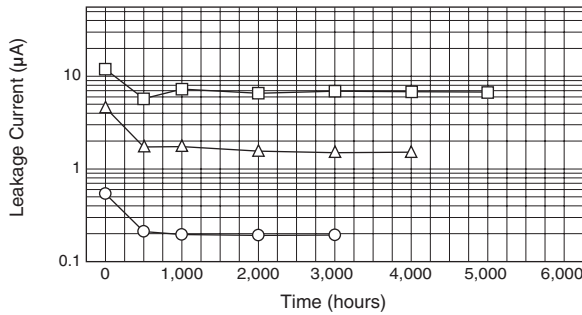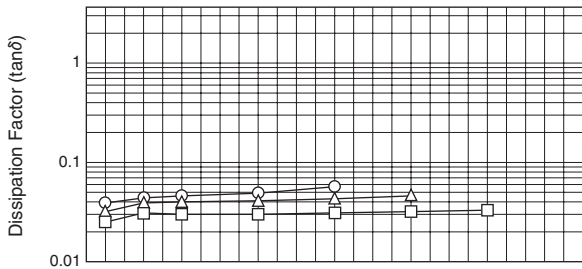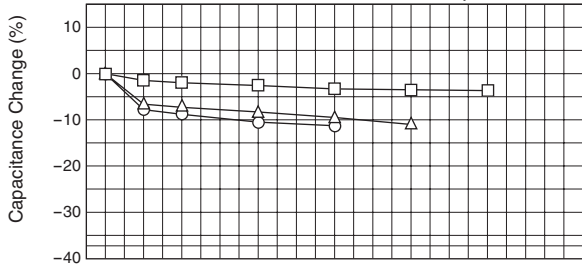


●105°C Shelf Life

○KZE 10V 220μF φ6.3×11L
 △KZE 16V 680μF φ10×16L
 □KZE 50V 470μF φ12.5×20L

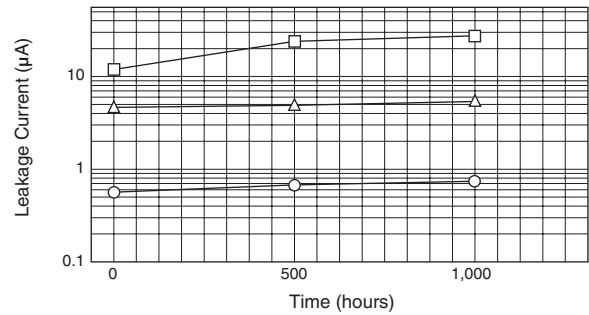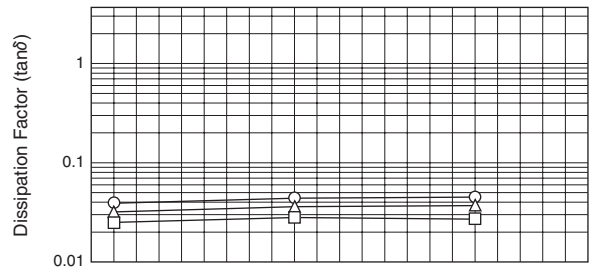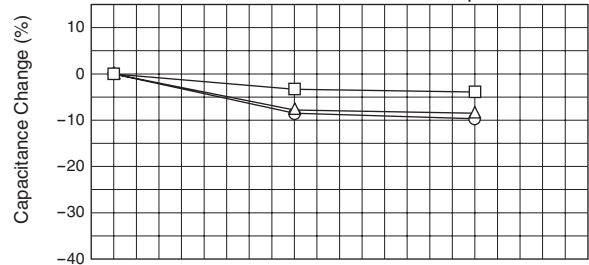

●Impedance-Frequency Characteristics

○KZE 10V 220μF φ6.3×11L
 △KZE 16V 680μF φ10×16L
 □KZE 50V 470μF φ12.5×20L at 20°C


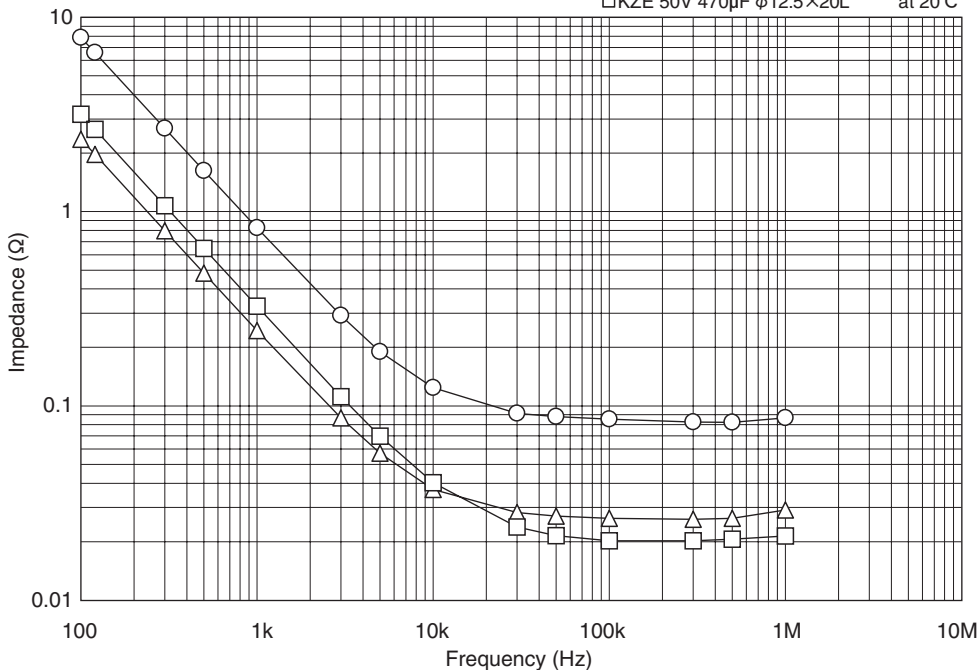


LXZ Series

LXY Series



●105°C Endurance with Rated Ripple Current

●105°C Endurance with Rated Ripple Current

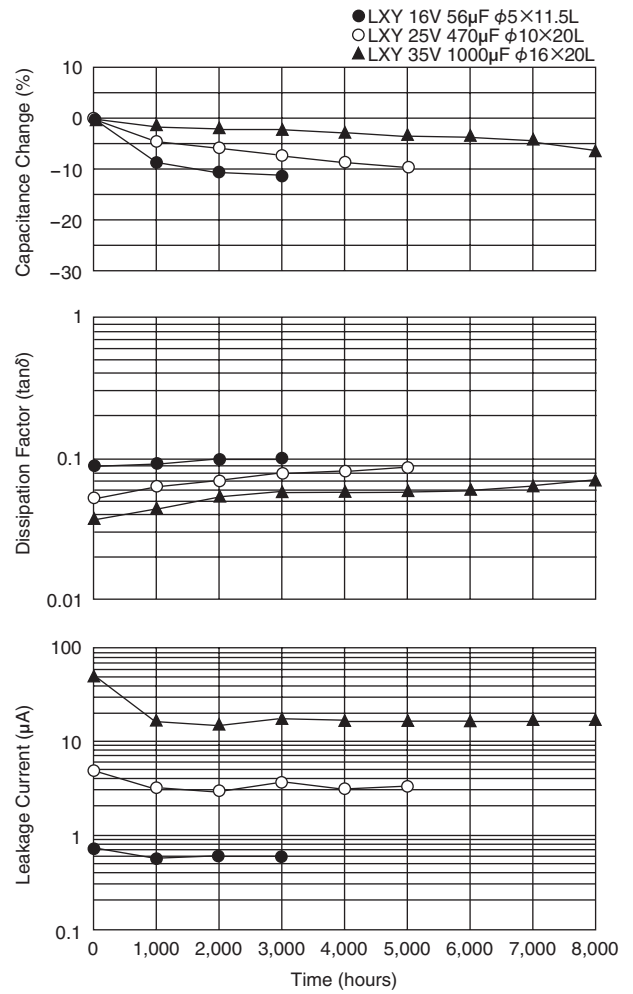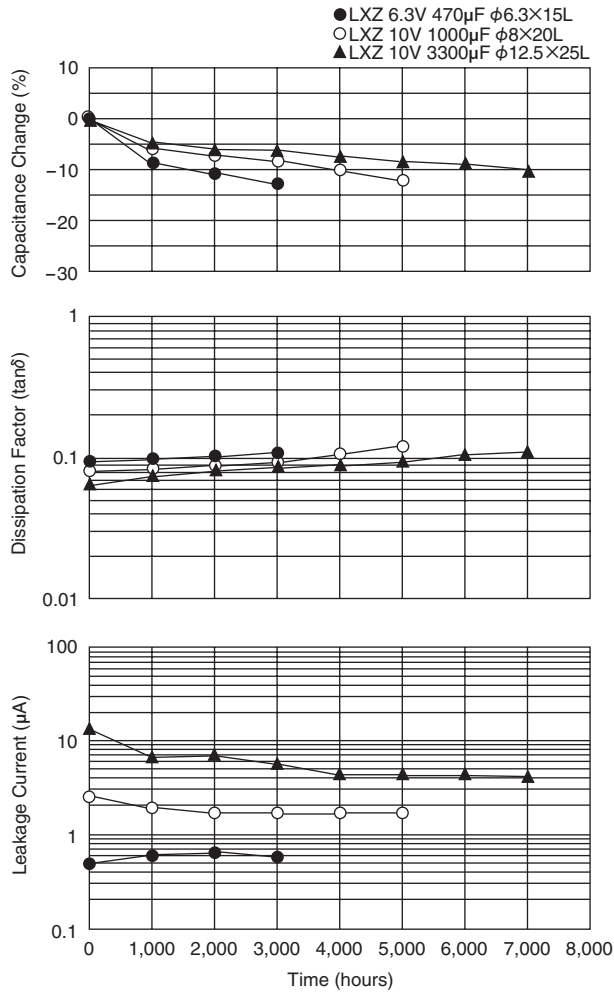


●Impedance-Frequency Characteristics


●Impedance-Frequency Characteristics

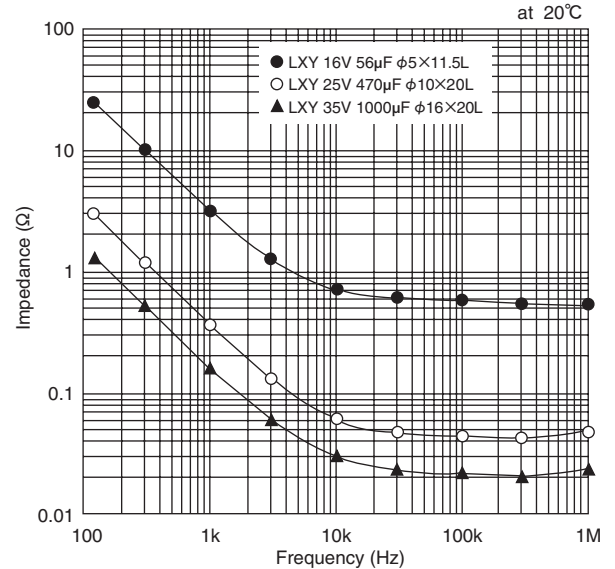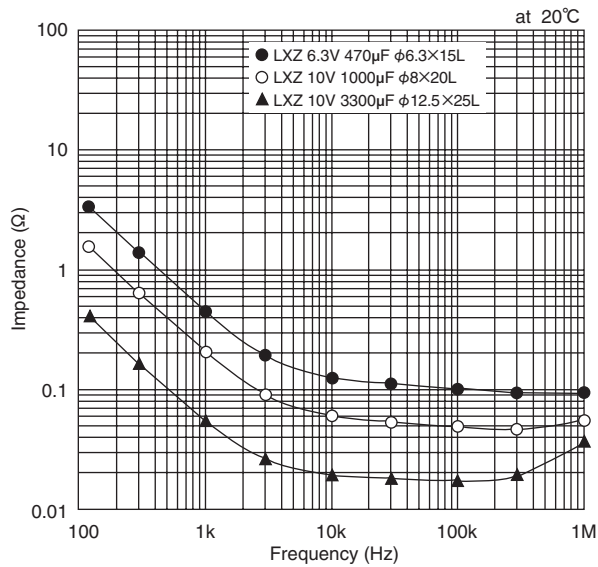


●105°C Endurance with Rated Ripple Current

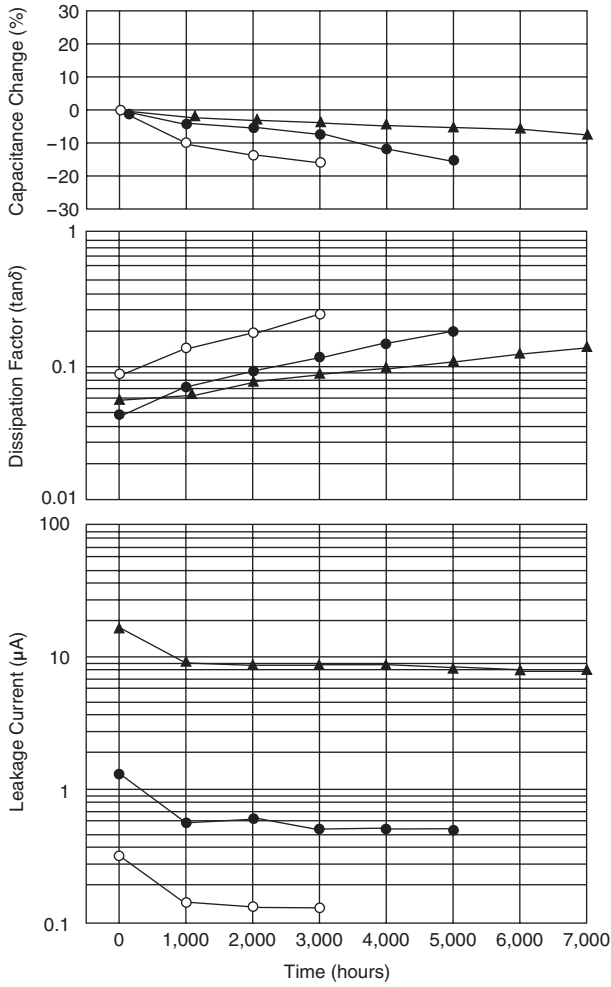


●105°C Shelf Life

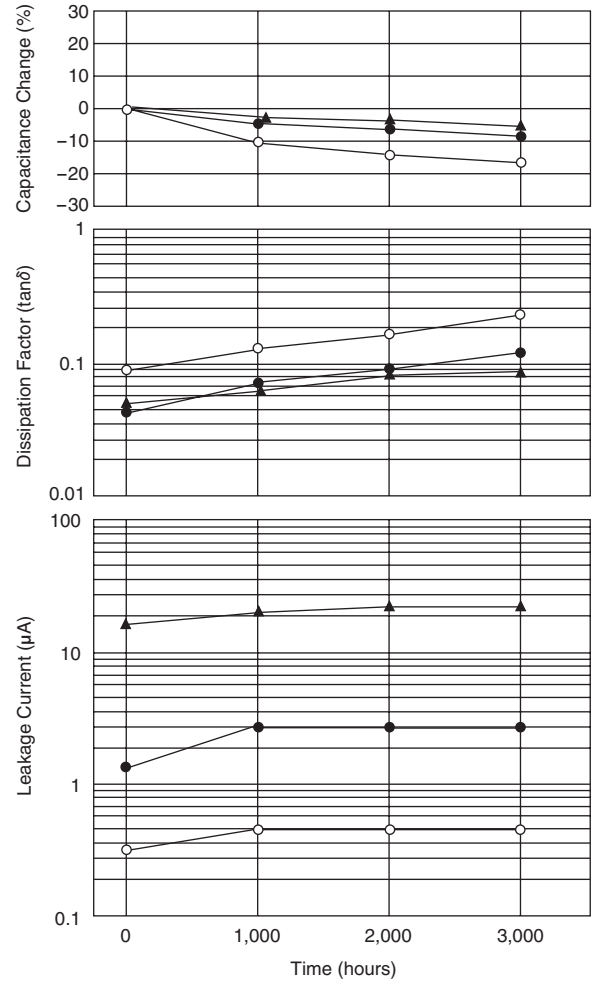

●Temperature Characteristics

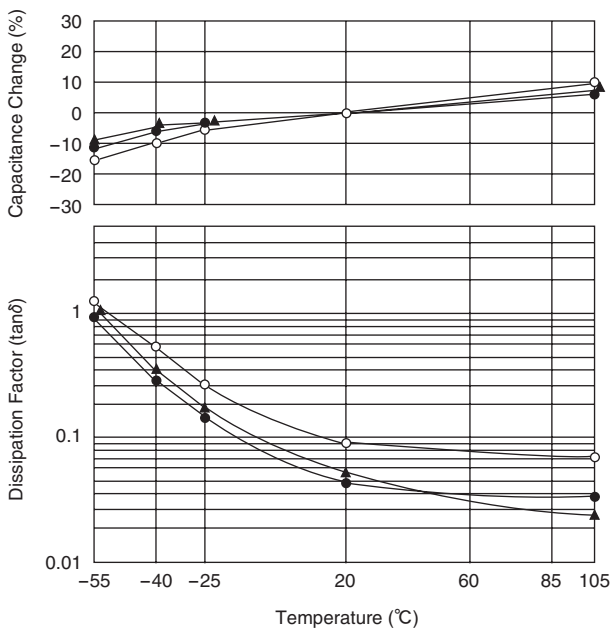


●Impedance-Frequency Characteristics

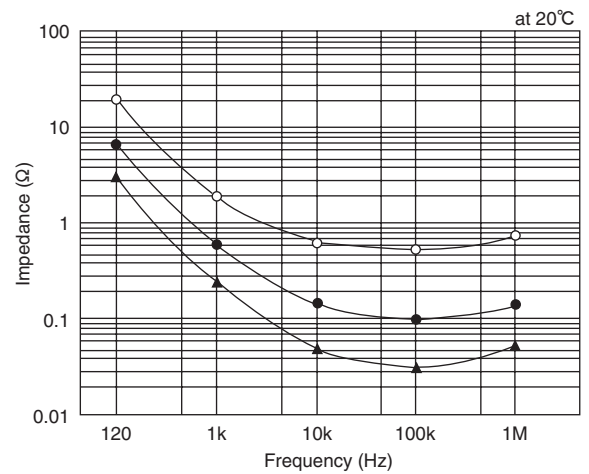


●125°C Endurance with Rated Ripple Current

- GXE 35V 100μF φ8×12L
- △ GXE 50V 100μF φ10×12.5L
- GXE 10V 3300μF φ16×25L

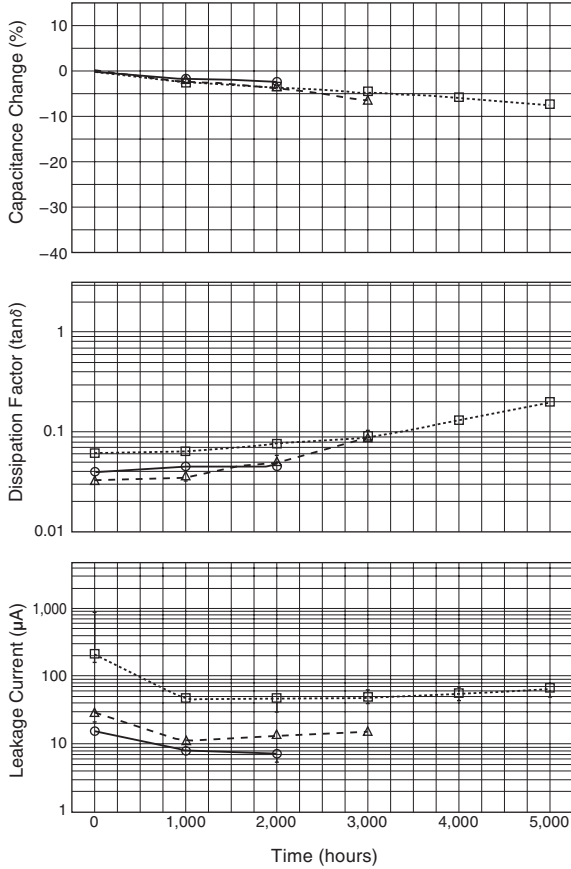


●Impedance-Frequency Characteristics

- GXE 35V 100μF φ8×12L
- △ GXE 50V 100μF φ10×12.5L
- GXE 10V 3300μF φ16×25L at 20°C

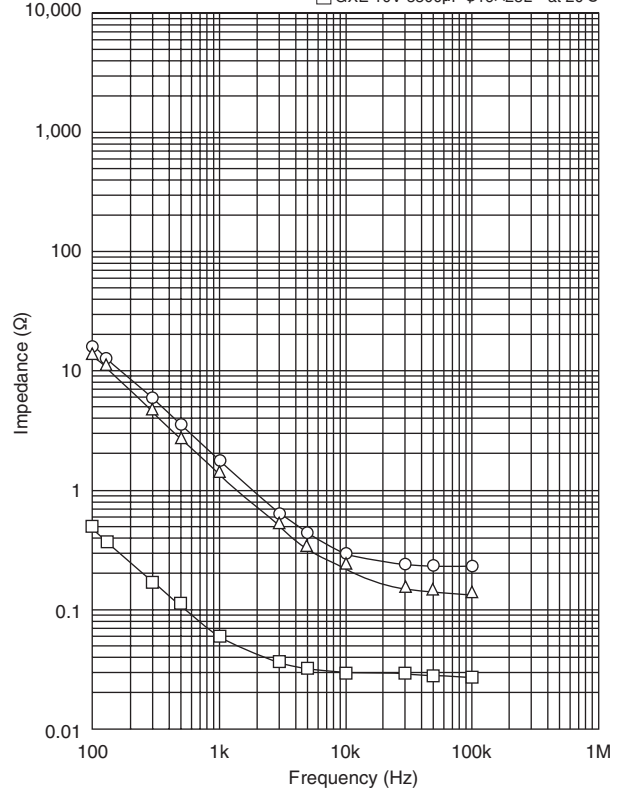


SMM Series

●85°C Endurance with Rated Ripple Current

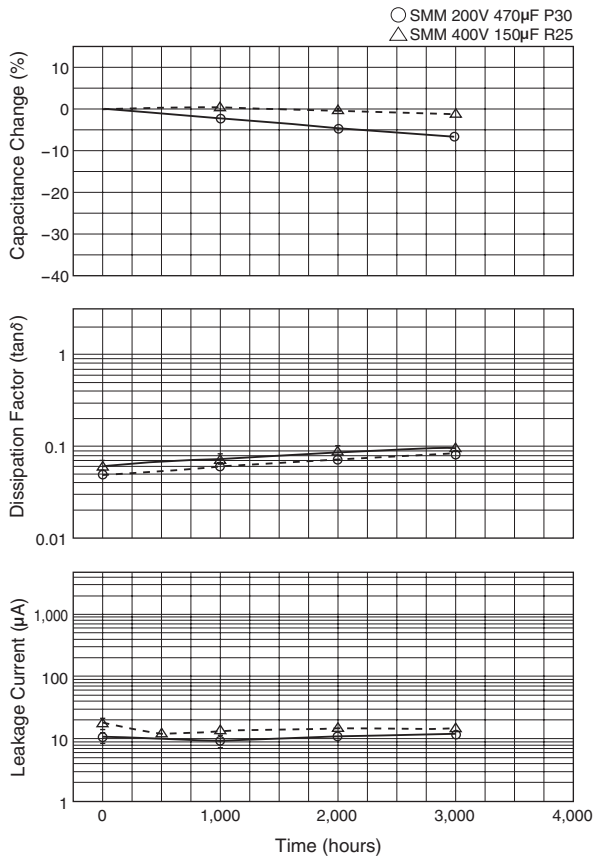


KMM Series

●105°C Endurance with Rated Ripple Current

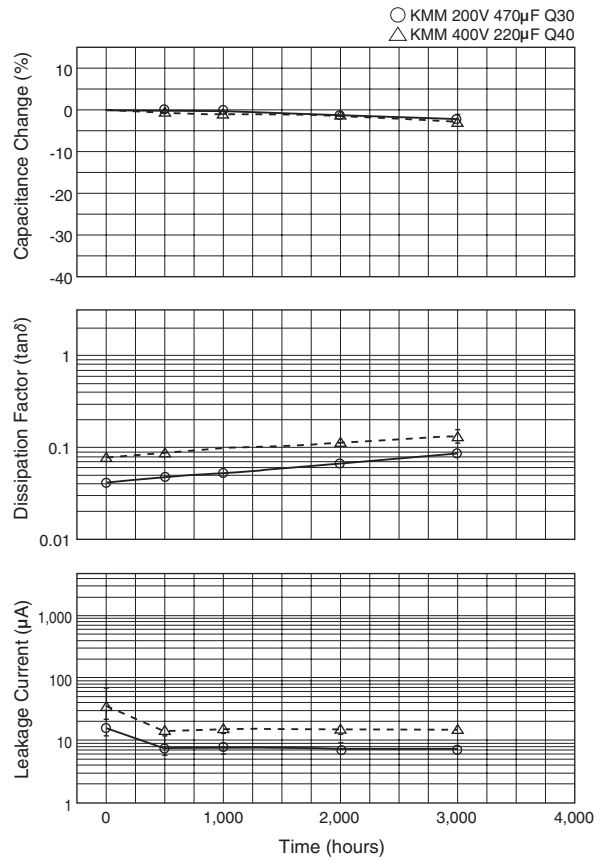


LXG Series

●105°C Endurance with Rated Ripple Current

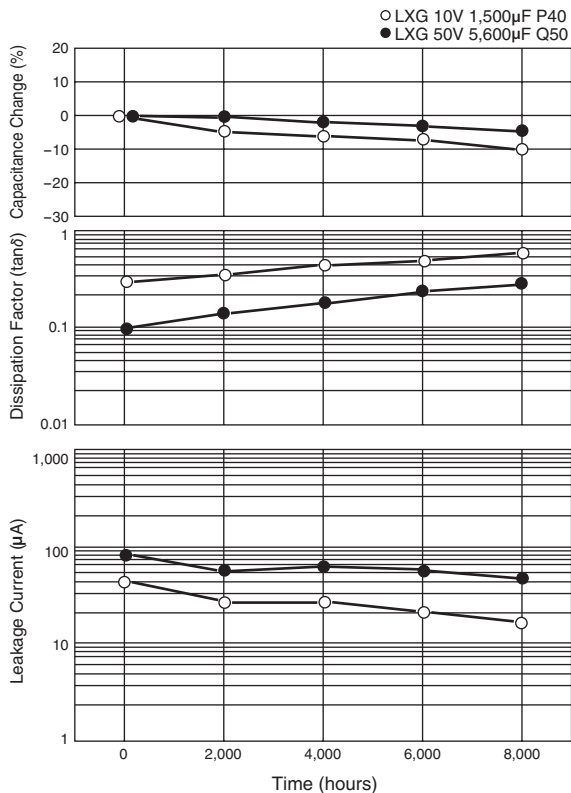

LXH Series


●105°C Endurance with Rated Ripple Current

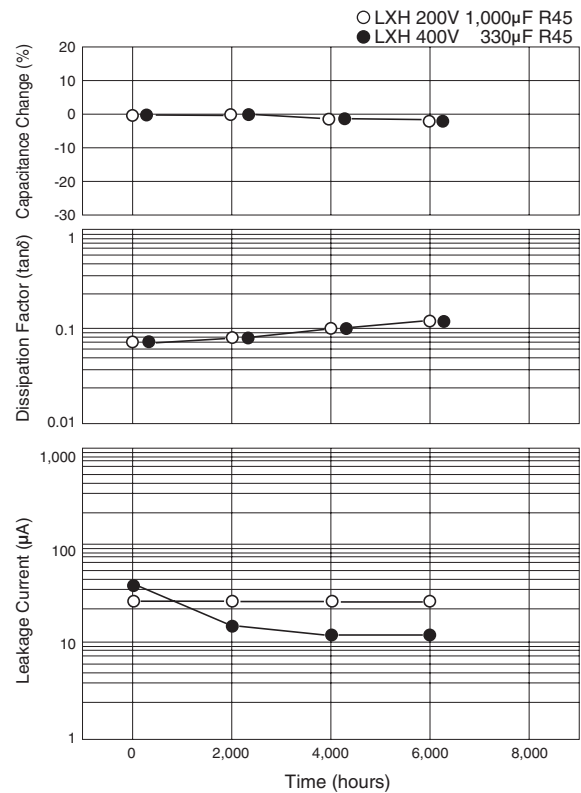

RWE/RWF/RWL Series

RWE/RWF series

●85°C Endurance with Rated Ripple Current

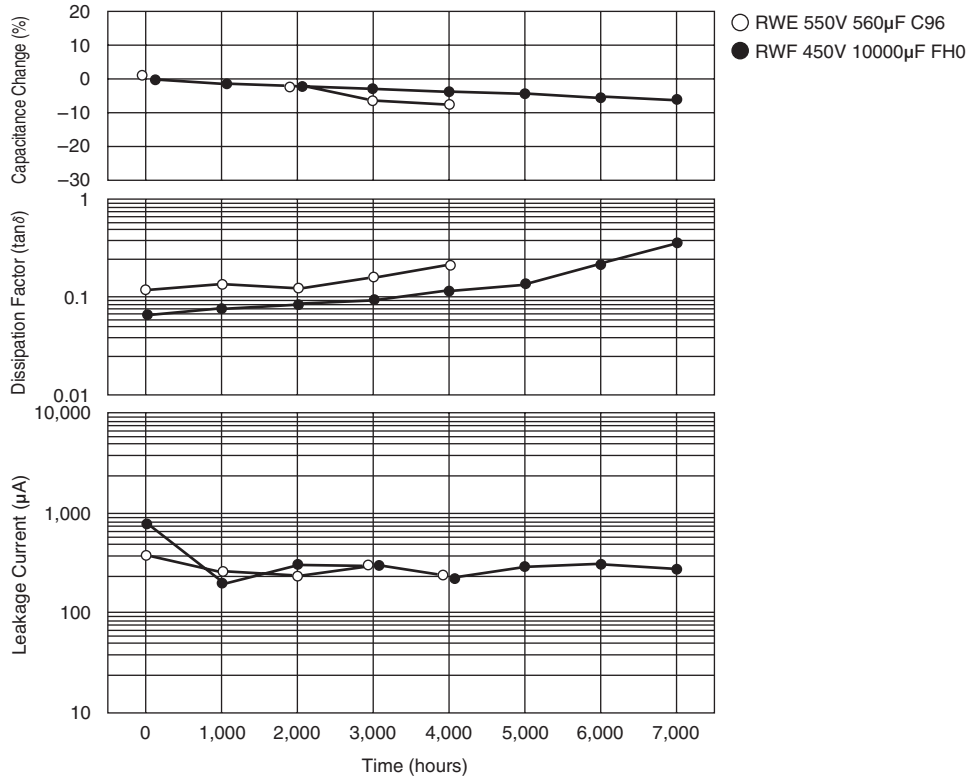

RWL series

●85°C Endurance with Rated Ripple Current

