


Reliability Test Data

MVL Series

MVH Series


●105°C Endurance

- MVL 6.3V 22μF D60
- △ MVL 50V 4.7μF E60
- × MVL 16V 47μF E60

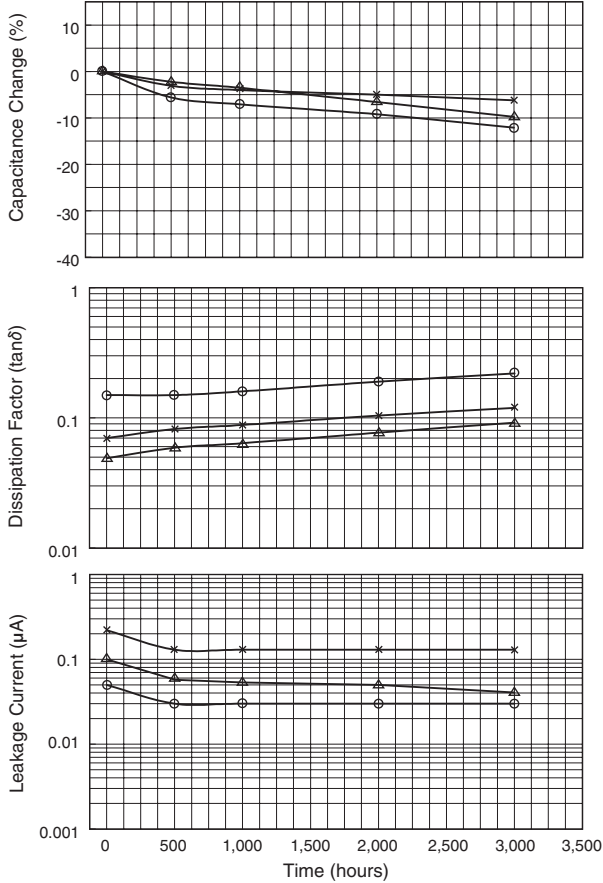



●125°C Endurance

- MVH 10V 220μF HA0
- △ MVH 35V 47μF HA0
- × MVH 50V 33μF HA0

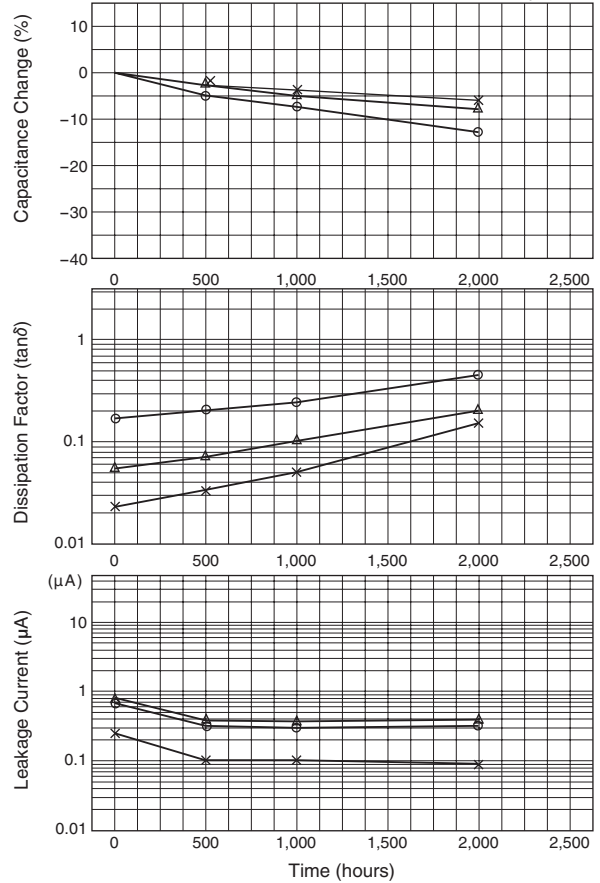




MVY Series

●Impedance/ESR vs Frequency

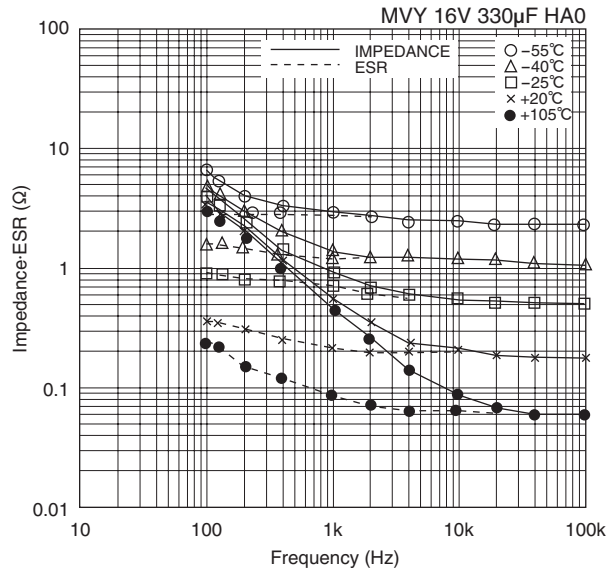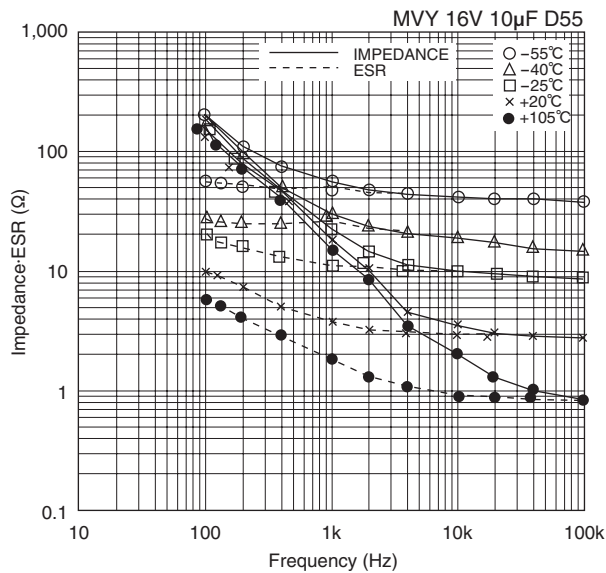




●105°C Endurance with Rated Ripple Current

○KZE 10V 220 μ F ϕ 6.3 \times 11L
 Δ KZE 16V 680 μ F ϕ 10 \times 16L
 \square KZE 50V 470 μ F ϕ 12.5 \times 20L

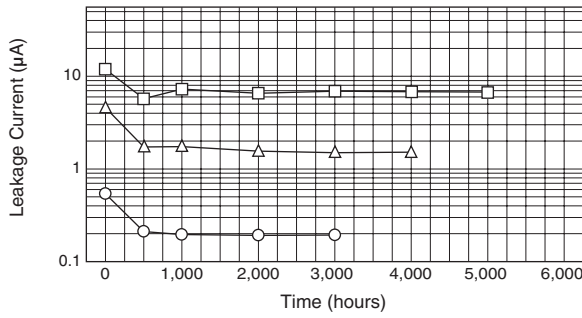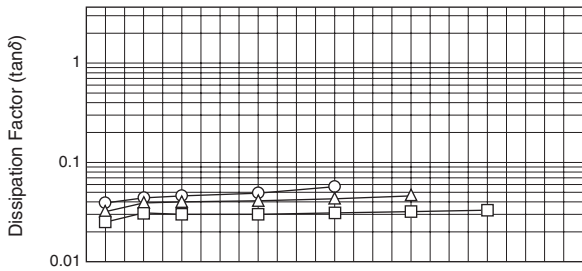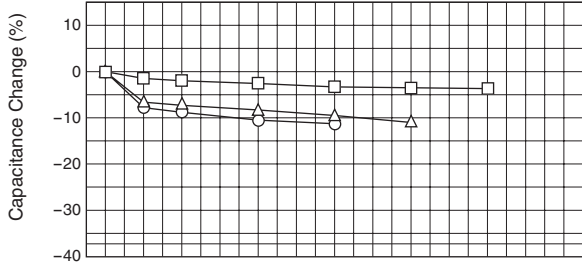


●105°C Shelf Life

○KZE 10V 220 μ F ϕ 6.3 \times 11L
 Δ KZE 16V 680 μ F ϕ 10 \times 16L
 \square KZE 50V 470 μ F ϕ 12.5 \times 20L

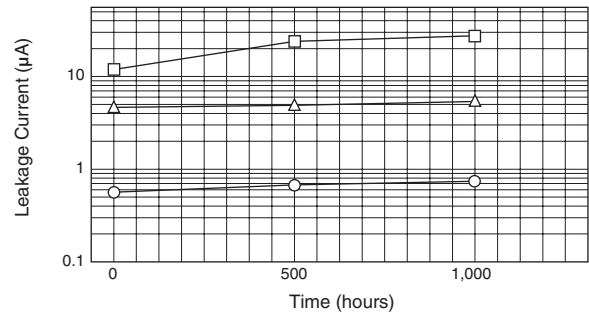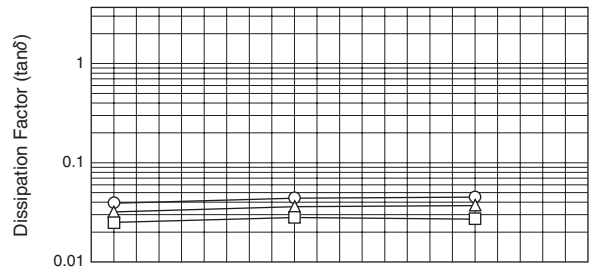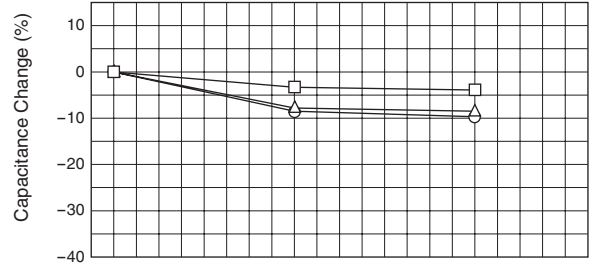

●Impedance-Frequency Characteristics

○KZE 10V 220 μ F ϕ 6.3 \times 11L
 Δ KZE 16V 680 μ F ϕ 10 \times 16L
 \square KZE 50V 470 μ F ϕ 12.5 \times 20L at 20°C


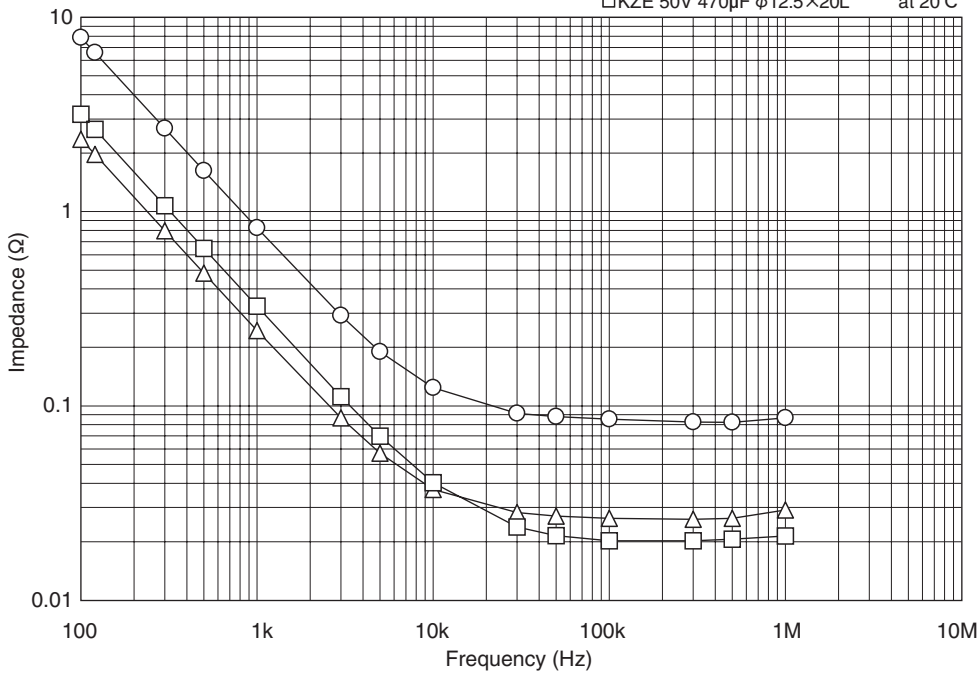


LXZ Series

LXY Series



●105°C Endurance with Rated Ripple Current

●105°C Endurance with Rated Ripple Current

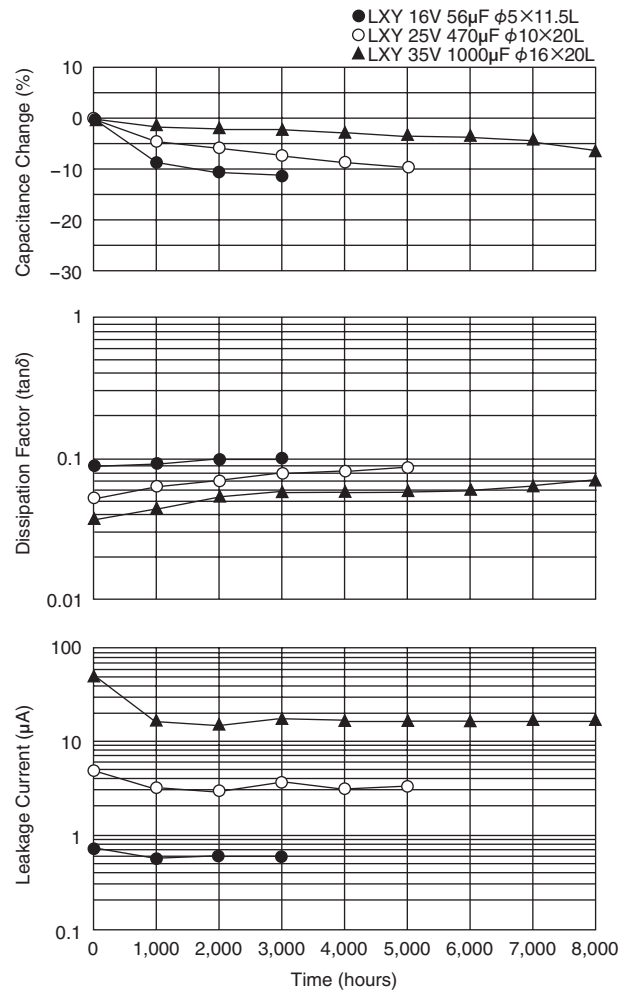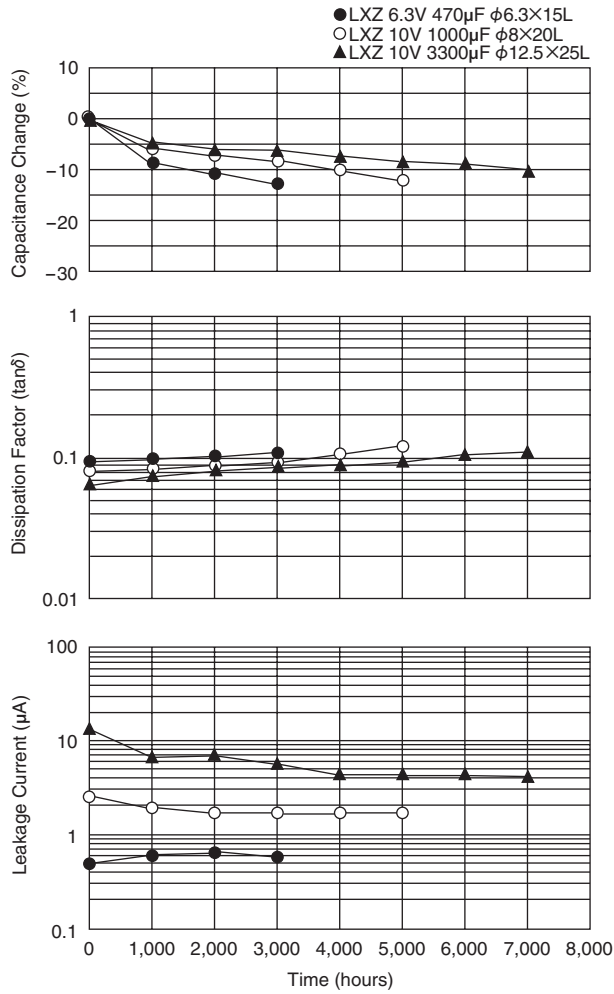


●Impedance-Frequency Characteristics


●Impedance-Frequency Characteristics

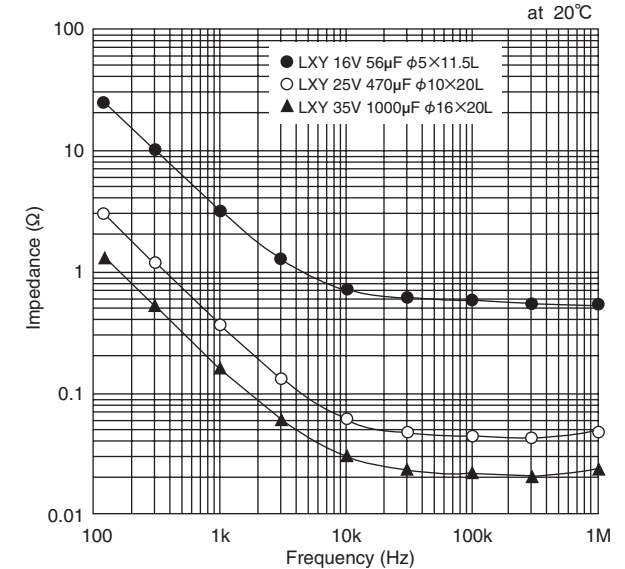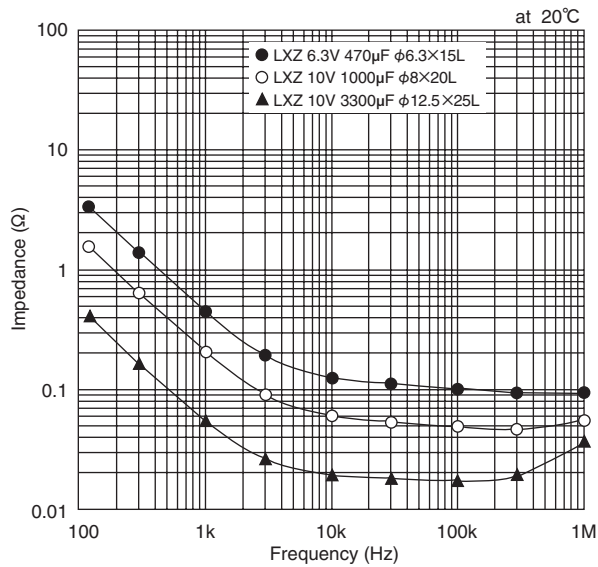


●105°C Endurance with Rated Ripple Current

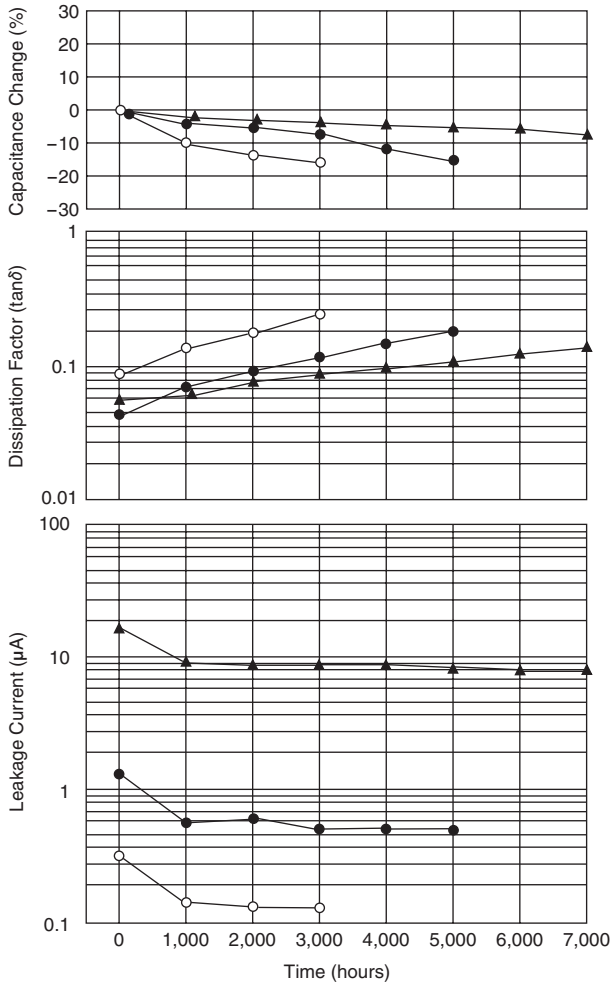


●105°C Shelf Life

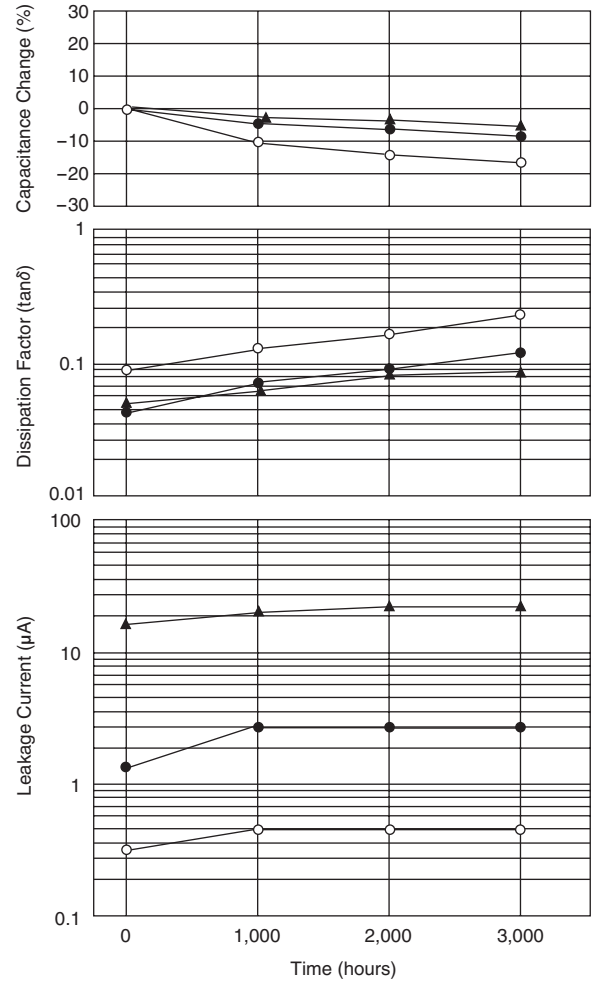

●Temperature Characteristics

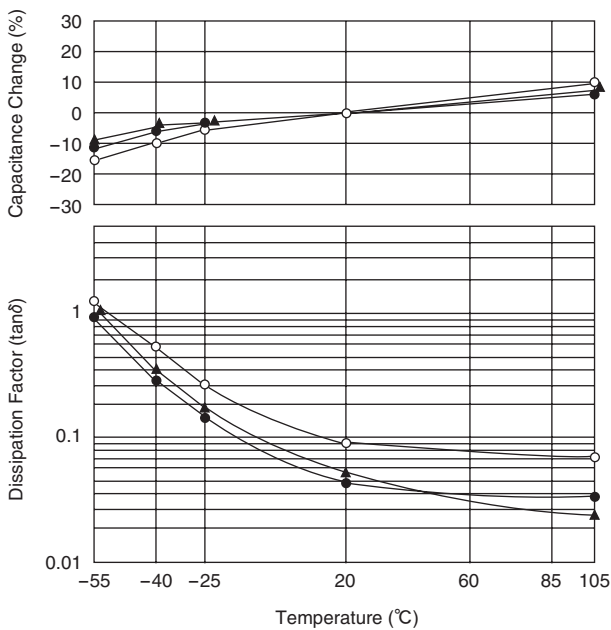


●Impedance-Frequency Characteristics

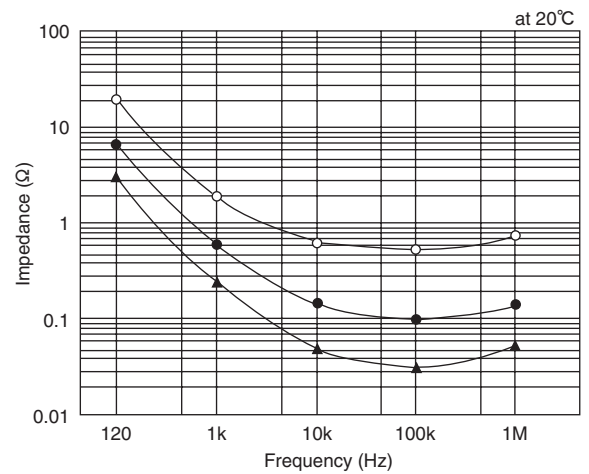


●125°C Endurance with Rated Ripple Current

- GXE 35V 100μF φ8×12L
- △ GXE 50V 100μF φ10×12.5L
- GXE 10V 3300μF φ16×25L

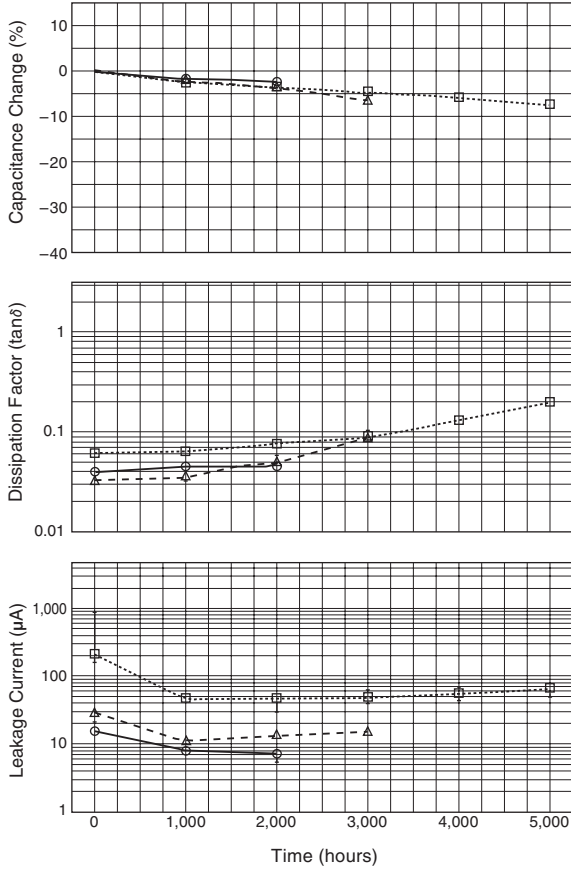


●Impedance-Frequency Characteristics

- GXE 35V 100μF φ8×12L
- △ GXE 50V 100μF φ10×12.5L
- GXE 10V 3300μF φ16×25L at 20°C

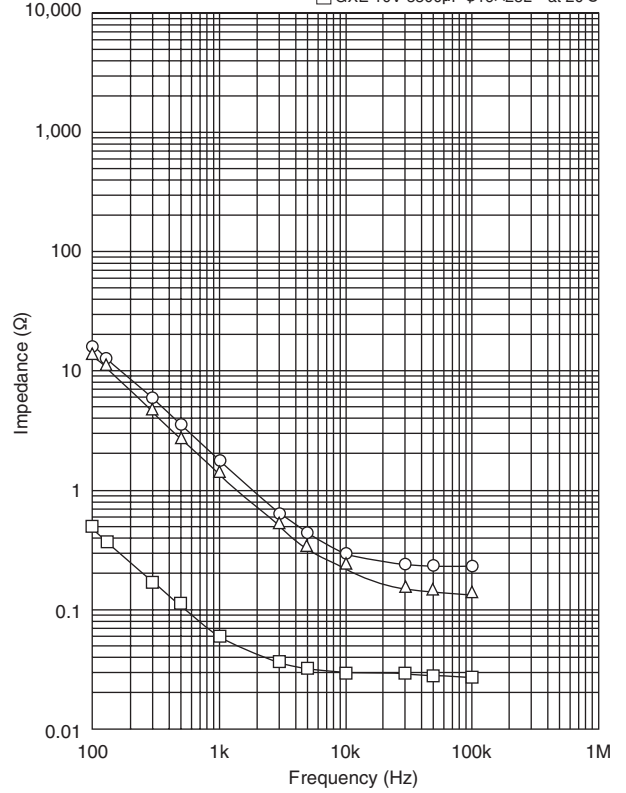


SMM Series

●85°C Endurance with Rated Ripple Current

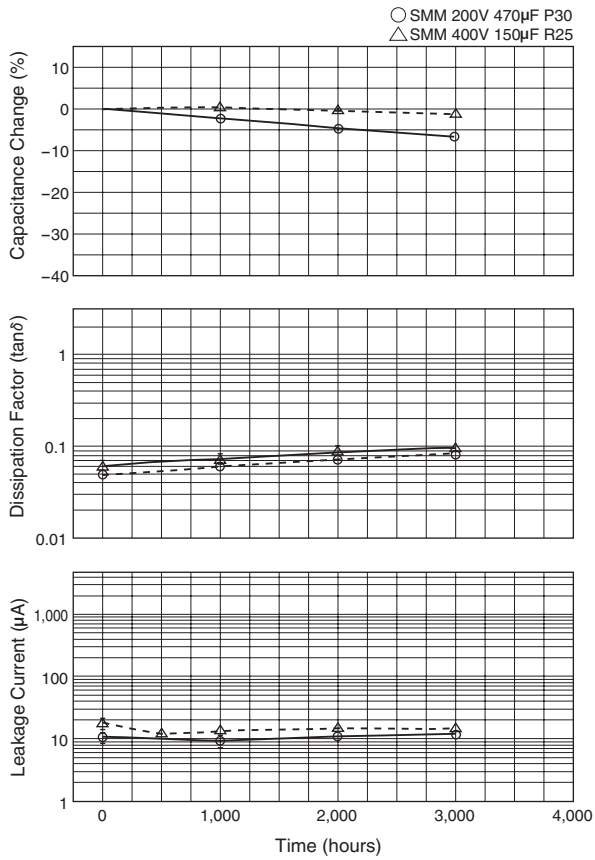


KMM Series

●105°C Endurance with Rated Ripple Current

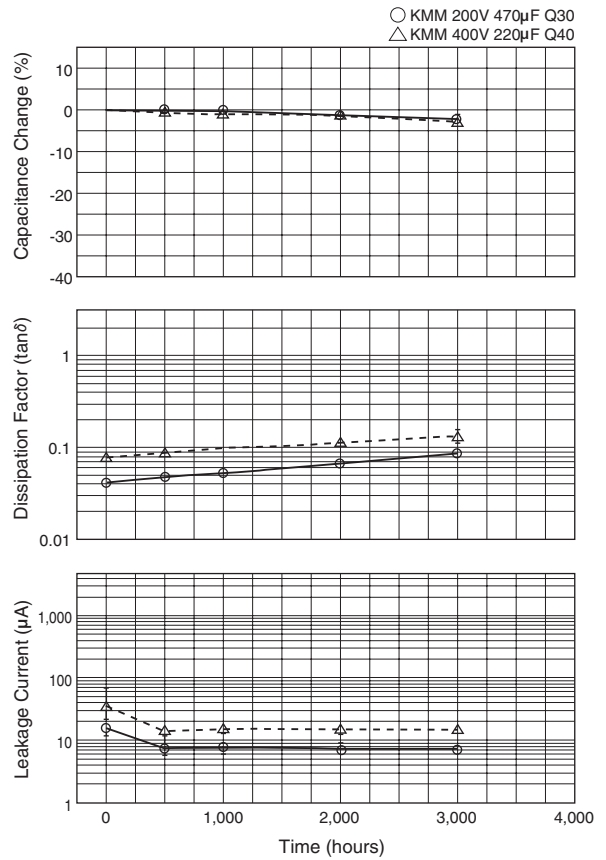


LXG Series

●105°C Endurance with Rated Ripple Current

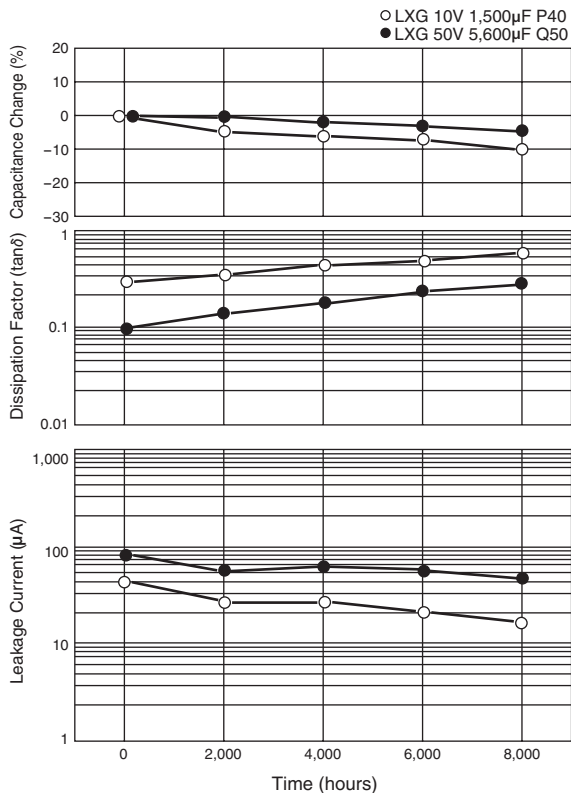

LXH Series


●105°C Endurance with Rated Ripple Current

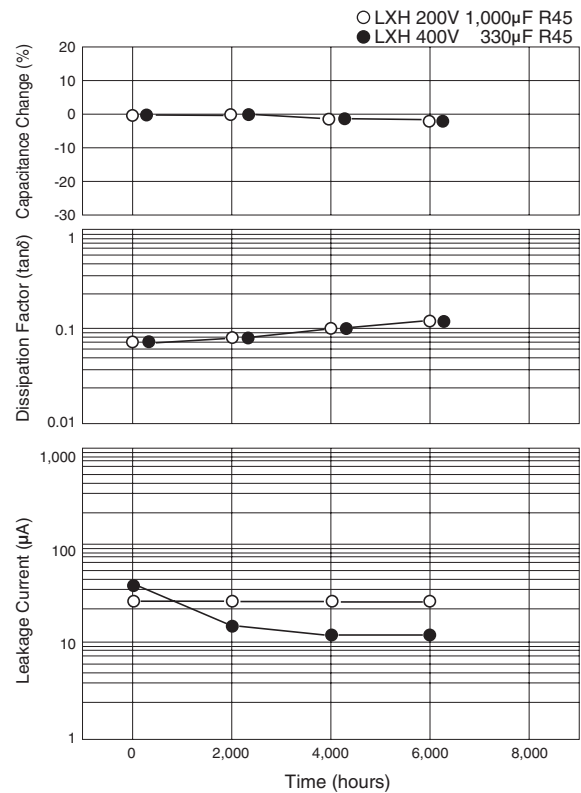

RWE/RWF/RWL Series

RWE/RWF series

●85°C Endurance with Rated Ripple Current

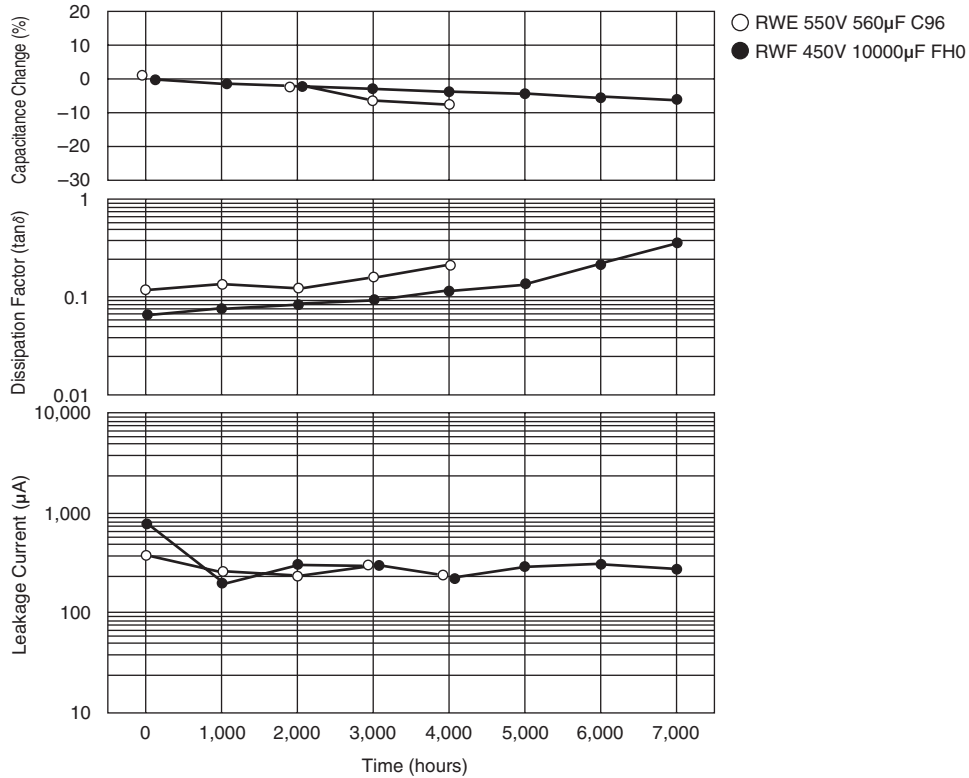

RWL series

●85°C Endurance with Rated Ripple Current

