

ASG Series

- Non solvent resistant type
- RoHS2 Compliant




SPECIFICATIONS

Items	Characteristics	
Category	-40 to +85°C	
Temperature Range	-40 to +85°C	
Rated Voltage Range	6.3 to 100V _{ac}	
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)	
Leakage Current	I=0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)	
Dissipation Factor (tan δ)	Rated voltage (V _{ac})	6.3V 10V 16V 25V 35V 50V 63V 100V
	tan δ (Max.)	0.34 0.24 0.20 0.16 0.14 0.12 0.10 0.08
	When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. (at 20°C, 120Hz)	
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{ac})	6.3V 10V 16V 25V 35V 50V 63V 100V
	Z(-25°C)/Z(+20°C)	5 4 3 2 2 2 2 2
	Z(-40°C)/Z(+20°C)	12 10 8 5 4 3 3 3 (at 120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 85°C.	
	Capacitance change	≤ ±20% of the initial value
	D.F. (tan δ)	≤200% of the initial specified value
	Leakage current	≤The initial specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 85°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.	
	Capacitance change	≤ ±20% of the initial value
	D.F. (tan δ)	≤200% of the initial specified value
	Leakage current	≤The initial specified value


DIMENSIONS[mm]

- Terminal Code : E

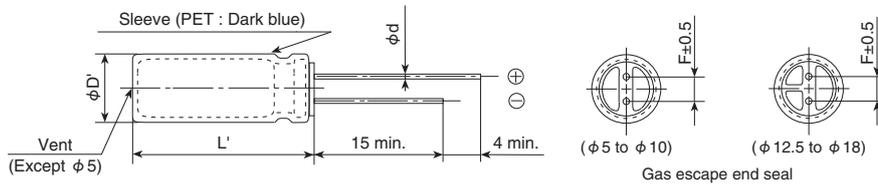

φD	5	6.3	8	10	12.5	16	18
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φD'	φD+0.5 max.						
L'	L+1.5 max.						

PART NUMBERING SYSTEM

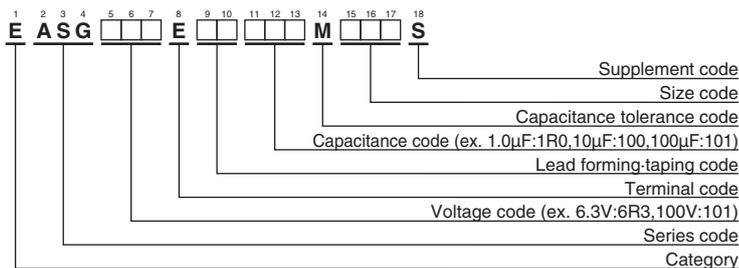

Please refer to "Product code guide (radial lead type)"



ASG Series

◆STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	tan δ	Part No.	WV (V _{dc})	Cap (μF)	Case size φD×L(mm)	tan δ	Part No.	
6.3	330	6.3 × 11	0.34	EASG6R3E□□331MF11S	50	1.0	5 × 11	0.12	EASG500E□□1R0ME11S	
	470	6.3 × 11	0.34	EASG6R3E□□471MF11S		2.2	5 × 11	0.12	EASG500E□□2R2ME11S	
	1,000	8 × 11.5	0.34	EASG6R3E□□102MHB5S		3.3	5 × 11	0.12	EASG500E□□3R3ME11S	
	2,200	10 × 20	0.36	EASG6R3E□□222MJ20S		4.7	5 × 11	0.12	EASG500E□□4R7ME11S	
	3,300	10 × 20	0.38	EASG6R3E□□332MJ20S		10	5 × 11	0.12	EASG500E□□100ME11S	
	4,700	12.5 × 20	0.40	EASG6R3E□□472MK20S		22	5 × 11	0.12	EASG500E□□220ME11S	
	6,800	12.5 × 25	0.44	EASG6R3E□□682MK25S		33	5 × 11	0.12	EASG500E□□330ME11S	
	10,000	16 × 25	0.52	EASG6R3E□□103ML25S		47	6.3 × 11	0.12	EASG500E□□470MF11S	
	15,000	16 × 35.5	0.62	EASG6R3E□□153MLP1S		100	8 × 11.5	0.12	EASG500E□□101MHB5S	
10	220	5 × 11	0.24	EASG100E□□221ME11S		220	10 × 12.5	0.12	EASG500E□□221MJC5S	
	330	6.3 × 11	0.24	EASG100E□□331MF11S		330	10 × 16	0.12	EASG500E□□331MJ16S	
	470	6.3 × 11	0.24	EASG100E□□471MF11S		470	10 × 20	0.12	EASG500E□□471MJ20S	
	1,000	10 × 12.5	0.24	EASG100E□□102MJC5S		1,000	12.5 × 25	0.12	EASG500E□□102MK25S	
	2,200	10 × 20	0.26	EASG100E□□222MJ20S		2,200	16 × 35.5	0.14	EASG500E□□222MLP1S	
	3,300	12.5 × 20	0.28	EASG100E□□332MK20S		3,300	18 × 35.5	0.16	EASG500E□□332MMP1S	
	4,700	12.5 × 25	0.30	EASG100E□□472MK25S		63	10	5 × 11	0.10	EASG630E□□100ME11S
	6,800	16 × 25	0.34	EASG100E□□682ML25S			22	5 × 11	0.10	EASG630E□□220ME11S
	10,000	16 × 35.5	0.42	EASG100E□□103MLP1S			33	6.3 × 11	0.10	EASG630E□□330MF11S
15,000	18 × 35.5	0.52	EASG100E□□153MMP1S	47	6.3 × 11		0.10	EASG630E□□470MF11S		
16	100	5 × 11	0.20	EASG160E□□101ME11S	100		10 × 12.5	0.10	EASG630E□□101MJC5S	
	220	6.3 × 11	0.20	EASG160E□□221MF11S	220		10 × 16	0.10	EASG630E□□221MJ16S	
	330	8 × 11.5	0.20	EASG160E□□331MHB5S	330		10 × 20	0.10	EASG630E□□331MJ20S	
	470	8 × 11.5	0.20	EASG160E□□471MHB5S	470		12.5 × 20	0.10	EASG630E□□471MK20S	
	1,000	10 × 16	0.20	EASG160E□□102MJ16S	1,000		16 × 25	0.10	EASG630E□□102ML25S	
	2,200	12.5 × 20	0.22	EASG160E□□222MK20S	2,200		18 × 35.5	0.12	EASG630E□□222MMP1S	
	3,300	12.5 × 25	0.24	EASG160E□□332MK25S	100		1.0	5 × 11	0.08	EASG101E□□1R0ME11S
	4,700	16 × 25	0.26	EASG160E□□472ML25S			2.2	5 × 11	0.08	EASG101E□□2R2ME11S
	6,800	16 × 31.5	0.30	EASG160E□□682MLN3S		3.3	5 × 11	0.08	EASG101E□□3R3ME11S	
10,000	18 × 35.5	0.38	EASG160E□□103MMP1S	4.7		5 × 11	0.08	EASG101E□□4R7ME11S		
25	47	5 × 11	0.16	EASG250E□□470ME11S		10	6.3 × 11	0.08	EASG101E□□100MF11S	
	100	6.3 × 11	0.16	EASG250E□□101MF11S		22	8 × 11.5	0.08	EASG101E□□220MHB5S	
	220	8 × 11.5	0.16	EASG250E□□221MHB5S		33	8 × 11.5	0.08	EASG101E□□330MHB5S	
	330	8 × 11.5	0.16	EASG250E□□331MHB5S		47	10 × 12.5	0.08	EASG101E□□470MJC5S	
	470	10 × 12.5	0.16	EASG250E□□471MJC5S		100	10 × 20	0.08	EASG101E□□101MJ20S	
	1,000	10 × 20	0.16	EASG250E□□102MJ20S		220	12.5 × 25	0.08	EASG101E□□221MK25S	
	2,200	12.5 × 25	0.18	EASG250E□□222MK25S		330	12.5 × 25	0.08	EASG101E□□331MK25S	
	3,300	16 × 25	0.20	EASG250E□□332ML25S		470	16 × 25	0.08	EASG101E□□471ML25S	
	4,700	16 × 31.5	0.22	EASG250E□□472MLN3S	1,000	18 × 40	0.08	EASG101E□□102MM40S		
35	6,800	18 × 35.5	0.26	EASG250E□□682MMP1S						
	47	5 × 11	0.14	EASG350E□□470ME11S						
	100	6.3 × 11	0.14	EASG350E□□101MF11S						
	220	8 × 11.5	0.14	EASG350E□□221MHB5S						
	330	10 × 12.5	0.14	EASG350E□□331MJC5S						
	470	10 × 16	0.14	EASG350E□□471MJ16S						
	1,000	12.5 × 20	0.14	EASG350E□□102MK20S						
	2,200	16 × 25	0.16	EASG350E□□222ML25S						
	3,300	16 × 35.5	0.18	EASG350E□□332MLP1S						
4,700	18 × 35.5	0.20	EASG350E□□472MMP1S							

□□ : Enter the appropriate lead forming or taping code.

Production of the products shown in [] is scheduled to be discontinued.



- Always read "Notes on Use" before using the product in order to enable you to use the product correctly and prevent any faults and accidents from occurring.
- Request the Product Specification on the product of NIPPON CHEMI-CON CORPORATION to refer to it as well as this brochure prior to the order of the products. Some specific notes on use of the ordered product may be described in the specifications.
- The products listed in this catalog are designed and manufactured for general electronics equipment use and are not intended for use in applications that can adversely affect human life; where the malfunction of equipment may cause damage to life or property. In addition, our products are not intended to be used in specific applications that may cause a major social impact. Please consult with us in advance of usage of our products in the following listed applications. ① Aerospace equipment ② Power generation equipment such as thermal power, nuclear power etc. ③ Medical equipment ④ Transport equipment (automobiles, trains, ships, etc.) ⑤ Transportation control equipment ⑥ Disaster prevention / crime prevention equipment ⑦ Highly publicized information processing equipment ⑧ Submarine equipment ⑨ Other applications that are not considered general-purpose applications.
- The circuits described as examples in this catalog and the "delivery specifications" are featured in order to show the operations and usage of our products, however, this fact does not guarantee that the circuits are available to function in your equipment systems. We are not in any case responsible for any failures or damage caused by the use of information contained herein. You should examine our products, of which the characteristics are described in the "delivery specifications" and other documents, and determine whether or not our products suit your requirements according to the specifications of your equipment systems. Therefore, you bear final responsibility regarding the use of our products.
Please make sure that you take appropriate safety measures such as use of redundant design and malfunction prevention measures in order to prevent fatal accidents and/or fires in the event any of our products malfunction.
- We strongly recommend our customers to purchase Nippon Chemi-Con products only through our official sales channels. We assume no responsibility for any defects or damages caused by using products purchased from outside our official sales channel or of counterfeit goods. In addition, we will ask the customer to pay the investigation cost for products purchased outside our official sales channel.
- We reserve the right to discontinue production and delivery of products. We do not guarantee that all the products included in this catalog will be available in the future.
The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products
- We continually strive to improve the quality and reliability of our products, but in any case that our product does not meet our published specifications, please stop using it promptly and contact us immediately. As for compensation for non-conforming goods delivered by Chemi-Con, we will limit it only to goods found in non-compliance of our published specifications. This may be accomplished by a no cost replacement of non-conforming individual products, a credit of the piece price paid per each individual non-conforming product, or in other ways deemed necessary.
In addition, we have an established system with enhanced traceability, therefore we will limit the applicable lot items for any potential compensation.

[Part Numbering System](#)

[Part Numbering System \(Appendix\)](#)

[Standardization](#)

[Available Items by Manufacturing Locations](#)

[Environmental Measures](#)

[Technical Note](#)

[Precautions and Guidelines](#)

[Recommended Soldering Conditions](#)

[Taping, Lead-preforming and Packaging](#)

[Available Terminals for Snap-in and Screw Mount Type](#)