

NPCAP™-PMF Series

- The new construction provides a low profile and high CV.
- Super low ESR, impedance, and high heat resistance characteristics have been secured by using highly conductive polymer electrolytic materials.
- Compatible with digitalization and high frequencies of electrical equipment with superior noise absorption.
- Excellent ESR characteristics, high ripple current, 5,000 hours at 105°C.
- Low-profile product lineup
- Outer coating: Flame-retardant epoxy resin UL94 V-0 or equivalent
- Higher reflow heat resistance
- Non-solvent resistant type
- RoHS2 Compliant
- Halogen free products
- This product can't be used for applications related to human life (such as in-vehicle equipment).




◆ SPECIFICATIONS

Items	Characteristics																		
Category																			
Temperature Range	-55 to +105°C																		
Rated Voltage Range	16 to 25V _{dc}																		
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)																		
Leakage Current <small>*Note</small>	Shall not exceed values shown in STANDARD RATINGS. (at 20°C after 2 minutes)																		
Dissipation Factor (tan δ)	0.12 max. (at 20°C, 120Hz)																		
Low Temperature Characteristics (Max. Impedance Ratio)	Z(-25°C)/Z(+20°C) ≤ 1.15 Z(-55°C)/Z(+20°C) ≤ 1.25 (at 100kHz)																		
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 5,000 hours at 105°C. <table border="1" style="width:100%; border-collapse: collapse;"> <tr><td>Appearance</td><td>No significant damage</td></tr> <tr><td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr><td>D.F. (tan δ)</td><td>≤ 200% of the initial specified value</td></tr> <tr><td>ESR</td><td>≤ 200% of the initial specified value</td></tr> <tr><td>Leakage current</td><td>≤ The initial specified value</td></tr> </table>	Appearance	No significant damage	Capacitance change	≤ ±20% of the initial value	D.F. (tan δ)	≤ 200% of the initial specified value	ESR	≤ 200% of the initial specified value	Leakage current	≤ The initial specified value								
Appearance	No significant damage																		
Capacitance change	≤ ±20% of the initial value																		
D.F. (tan δ)	≤ 200% of the initial specified value																		
ESR	≤ 200% of the initial specified value																		
Leakage current	≤ The initial specified value																		
Damp Heat (Steady State)	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 60°C, 90 to 95% RH without voltage applied. <table border="1" style="width:100%; border-collapse: collapse;"> <tr><td>Appearance</td><td>No significant damage</td></tr> <tr><td>Capacitance change</td><td>≤ -20 to +40% of the initial value</td></tr> <tr><td>D.F. (tan δ)</td><td>≤ 200% of the initial specified value</td></tr> <tr><td>ESR</td><td>≤ 200% of the initial specified value</td></tr> <tr><td>Leakage current</td><td>≤ The initial specified value</td></tr> </table>	Appearance	No significant damage	Capacitance change	≤ -20 to +40% of the initial value	D.F. (tan δ)	≤ 200% of the initial specified value	ESR	≤ 200% of the initial specified value	Leakage current	≤ The initial specified value								
Appearance	No significant damage																		
Capacitance change	≤ -20 to +40% of the initial value																		
D.F. (tan δ)	≤ 200% of the initial specified value																		
ESR	≤ 200% of the initial specified value																		
Leakage current	≤ The initial specified value																		
Surge Voltage	The capacitors shall be subjected to 1,000 cycles each consisting of charge with the surge voltage specified at 105°C for 30 seconds through a protective resistor(R=1kΩ) and discharge for 5 minutes 30 seconds. <table border="1" style="width:100%; border-collapse: collapse; margin-top: 5px;"> <tr> <td>Rated voltage (V_{dc})</td> <td>16</td> <td>20</td> <td>25</td> </tr> <tr> <td>Surge voltage (V_{dc})</td> <td>18</td> <td>23</td> <td>29</td> </tr> </table> <table border="1" style="width:100%; border-collapse: collapse; margin-top: 5px;"> <tr><td>Appearance</td><td>No significant damage</td></tr> <tr><td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr><td>D.F. (tan δ)</td><td>≤ 200% of the initial specified value</td></tr> <tr><td>ESR</td><td>≤ 200% of the initial specified value</td></tr> <tr><td>Leakage current</td><td>≤ The initial specified value</td></tr> </table>	Rated voltage (V _{dc})	16	20	25	Surge voltage (V _{dc})	18	23	29	Appearance	No significant damage	Capacitance change	≤ ±20% of the initial value	D.F. (tan δ)	≤ 200% of the initial specified value	ESR	≤ 200% of the initial specified value	Leakage current	≤ The initial specified value
Rated voltage (V _{dc})	16	20	25																
Surge voltage (V _{dc})	18	23	29																
Appearance	No significant damage																		
Capacitance change	≤ ±20% of the initial value																		
D.F. (tan δ)	≤ 200% of the initial specified value																		
ESR	≤ 200% of the initial specified value																		
Leakage current	≤ The initial specified value																		
Soldering Heat	The following specifications shall be satisfied when the solder temperature is reduced back to 20°C to measure dip resistance after soldering has been performed under the recommended soldering conditions. <table border="1" style="width:100%; border-collapse: collapse; margin-top: 5px;"> <tr><td>Appearance</td><td>No significant damage</td></tr> <tr><td>Capacitance change</td><td>≤ ±20% of the initial value</td></tr> <tr><td>D.F. (tan δ)</td><td>≤ 150% of the initial specified value</td></tr> <tr><td>ESR</td><td>≤ 150% of the initial specified value</td></tr> <tr><td>Leakage current</td><td>≤ The initial specified value (Voltage treatment)</td></tr> </table>	Appearance	No significant damage	Capacitance change	≤ ±20% of the initial value	D.F. (tan δ)	≤ 150% of the initial specified value	ESR	≤ 150% of the initial specified value	Leakage current	≤ The initial specified value (Voltage treatment)								
Appearance	No significant damage																		
Capacitance change	≤ ±20% of the initial value																		
D.F. (tan δ)	≤ 150% of the initial specified value																		
ESR	≤ 150% of the initial specified value																		
Leakage current	≤ The initial specified value (Voltage treatment)																		

*Note : If any doubt arises, measure the leakage current after the following voltage treatment.
Voltage treatment : DC rated voltage is applied to the capacitors for 120 minutes at 105°C.

◆ DIMENSIONS [mm]

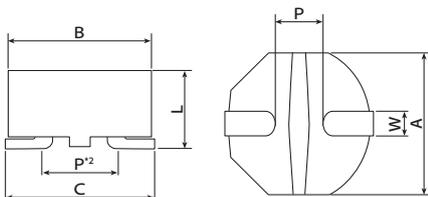

*2 : The dimension P (the distance between terminals) shall be the shortest distance between the land and grounding surface.

Size code	A	B	C	L	W	P
F30	7.0±0.1	7.0±0.1	7.2±0.2	3.0 max.	1.2±0.2	3.50±0.2

◆ MARKING

EX) 25V33μF



• Rated voltage symbol

Rated voltage (V _{dc})	16	20	25
Symbol	C	D	E


• Capacitance symbol

Capacitance code (ex. 33μF : 330)



NPCAP™-PMF Series

◆PART NUMBERING SYSTEM

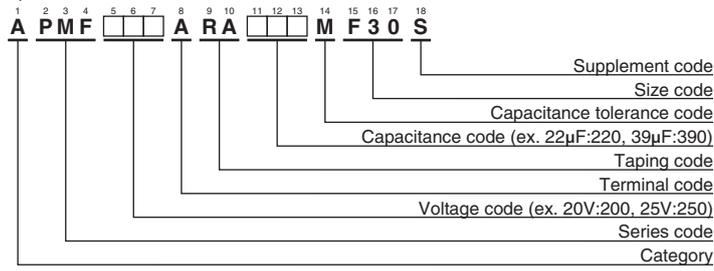

Please refer to "Product code guide (conductive polymer type)"

◆STANDARD RATINGS

WV (V _{dc})	Cap (µF)	Size code	Leakage current (µA max./after 2min.)	ESR (mΩ max./20°C, 100k to 300kHz)	Rated ripple current (mArms/105°C, 100kHz)	Part No.
16	56	F30	448	40	2,200	APMF160ARA560MF30S
	68	F30	544	50	2,000	APMF160ARA680MF30S
20	39	F30	390	45	2,100	APMF200ARA390MF30S
	47	F30	470	50	2,000	APMF200ARA470MF30S
25	22	F30	275	50	2,000	APMF250ARA220MF30S
	33	F30	412	50	2,000	APMF250ARA330MF30S

◆RATED RIPPLE CURRENT MULTIPLIERS

● Frequency Multipliers

Frequency(Hz)	120	1k	10k	50k	100k to 500k
SMD type	0.05	0.30	0.55	0.70	1.00



- Always read "Notes on Use" before using the product in order to enable you to use the product correctly and prevent any faults and accidents from occurring.
- Request the Product Specification on the product of NIPPON CHEMI-CON CORPORATION to refer to it as well as this brochure prior to the order of the products. Some specific notes on use of the ordered product may be described in the specifications.
- The products listed in this catalog are designed and manufactured for general electronics equipment use and are not intended for use in applications that can adversely affect human life; where the malfunction of equipment may cause damage to life or property. In addition, our products are not intended to be used in specific applications that may cause a major social impact. Please consult with us in advance of usage of our products in the following listed applications. ① Aerospace equipment ② Power generation equipment such as thermal power, nuclear power etc. ③ Medical equipment ④ Transport equipment (automobiles, trains, ships, etc.) ⑤ Transportation control equipment ⑥ Disaster prevention / crime prevention equipment ⑦ Highly publicized information processing equipment ⑧ Submarine equipment ⑨ Other applications that are not considered general-purpose applications.
- The circuits described as examples in this catalog and the "delivery specifications" are featured in order to show the operations and usage of our products, however, this fact does not guarantee that the circuits are available to function in your equipment systems. We are not in any case responsible for any failures or damage caused by the use of information contained herein. You should examine our products, of which the characteristics are described in the "delivery specifications" and other documents, and determine whether or not our products suit your requirements according to the specifications of your equipment systems. Therefore, you bear final responsibility regarding the use of our products.
Please make sure that you take appropriate safety measures such as use of redundant design and malfunction prevention measures in order to prevent fatal accidents and/or fires in the event any of our products malfunction.
- We strongly recommend our customers to purchase Nippon Chemi-Con products only through our official sales channels. We assume no responsibility for any defects or damages caused by using products purchased from outside our official sales channel or of counterfeit goods. In addition, we will ask the customer to pay the investigation cost for products purchased outside our official sales channel.
- We reserve the right to discontinue production and delivery of products. We do not guarantee that all the products included in this catalog will be available in the future.
The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products
- We continually strive to improve the quality and reliability of our products, but in any case that our product does not meet our published specifications, please stop using it promptly and contact us immediately. As for compensation for non-conforming goods delivered by Chemi-Con, we will limit it only to goods found in non-compliance of our published specifications. This may be accomplished by a no cost replacement of non-conforming individual products, a credit of the piece price paid per each individual non-conforming product, or in other ways deemed necessary.
In addition, we have an established system with enhanced traceability, therefore we will limit the applicable lot items for any potential compensation.

[Part Numbering System](#)

[Part Numbering System \(Appendix\)](#)

[Standardization](#)

[Available Items by Manufacturing Locations](#)

[Environmental Measures](#)

[Technical Note](#)

[Precautions and Guidelines](#)

[Recommended Soldering Conditions](#)

[Taping, Lead-preforming, Terminal and Packaging Options](#)