


GF Series



GF Series are combined Varistor with Thermal Fuse

●Coating resin : UL94V-0




Operating Temperature Range: -40 to +85°C

Storage Temperature Range: -50 to +125°C


◆STANDARD RATINGS

Part Number	Previous Part Number (Just for your reference)	Maximum Ratings					Max. Clamping Voltage	Capacitance Typical @1kHz	Varistor Voltage V CmA	T Max.	E ±1.0
		Max. Allowable Voltage	Max. Peak Current	Max. Energy	Rated Wattage						
15GF Type		AC(Vrms)	DC(V)	8/20μs(A)	2ms(J)	(W)	V50A (V)	(pF)	(V)	(mm)	(mm)
TND15GF271KB00EAA0	TNR15GF271K-E	175	225	2500A/2 times	50	0.6	440	680	270 (243~297)	9	1.5
TND15GF471KB00EAA0	TNR15GF471K-E	300	385		80	0.6	765	450	470 (423~517)	10	2.2
TND15GF821KB00EAA0	TNR15GF821K-E	510	670		110	0.6	1340	280	820 (738~902)	12	3.5
23GF Type		AC (Vrms)	DC (V)	8/20μs(A)	2ms(J)	(W)	V100A (V)	(pF)	(V)	(mm)	(mm)
TND23GF271KB00EAA0	TNR23GF271K-E	175	225	4000A/2 times	90	0.8	440	1850	270 (243~297)	9	1.5
TND23GF471KB00EAA0	TNR23GF471K-E	300	385		150	1.0	765	1200	470 (423~517)	10	2.3
TND23GF821KB00EAA0	TNR23GF821K-E	510	670		190	1.5	1340	800	820 (738~902)	12	3.6

◆DIMENSIONS [mm]

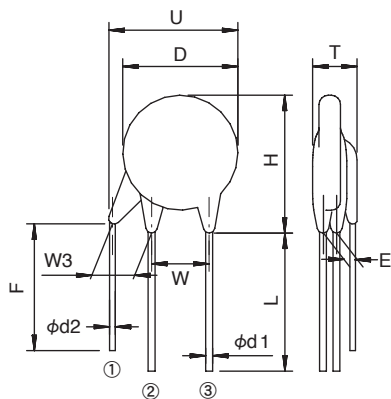


	15GF	23GF
D	18 Max.	25 Max.
T	Refer to Standard Ratings	
H	22 Max.	32 Max.
W	7.5±1	10±1
W3	2.5 Min.	2.5 Min.
L	25 Min.	25 Min.
U	23 Max.	28 Max.
F	17 Min.	17 Min.
E	Refer to Standard Ratings	
φd1	0.8±0.05	0.8±0.05
φd2	0.53±0.05	0.58±0.05



Type	Thermal fuse ratings
15GF	145°C-250V-1A
23GF	145°C-250V-3A


◆MARKING

EX)




GF Series

◆APPLICATION CIRCUIT EXAMPLE

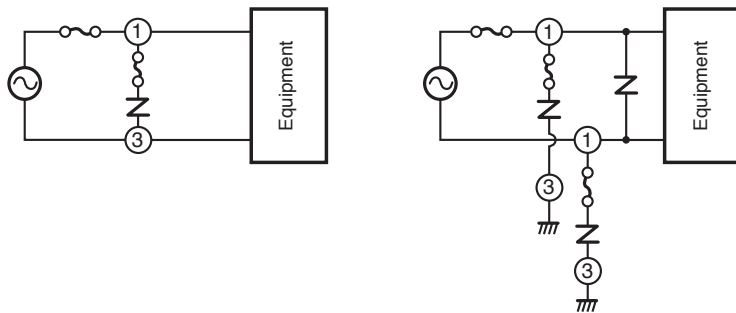


◆V-I CURVE

● TND15GF271K ~ TND15GF821K

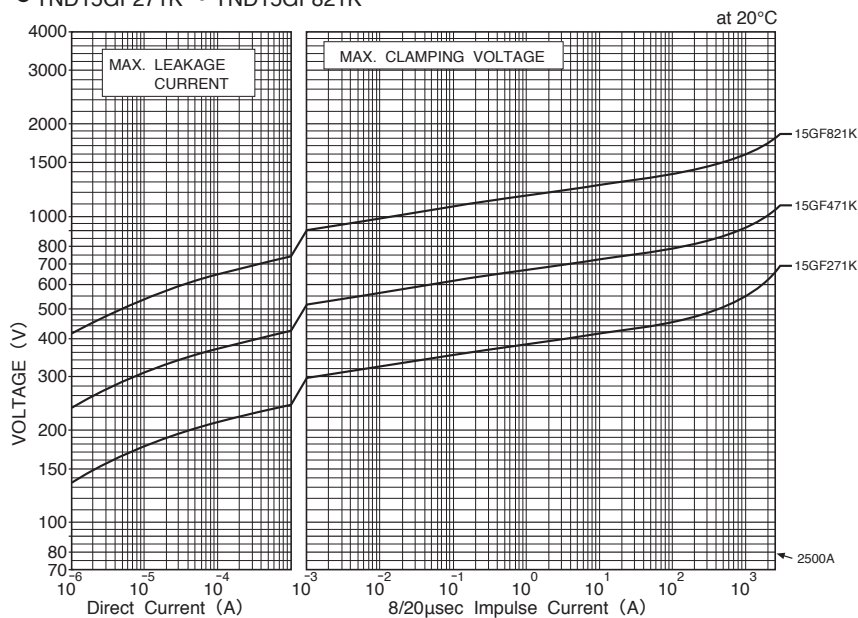


◆PULSE LIFE TIME RAITINGS


● TND15GF271K ~ TND15GF821K

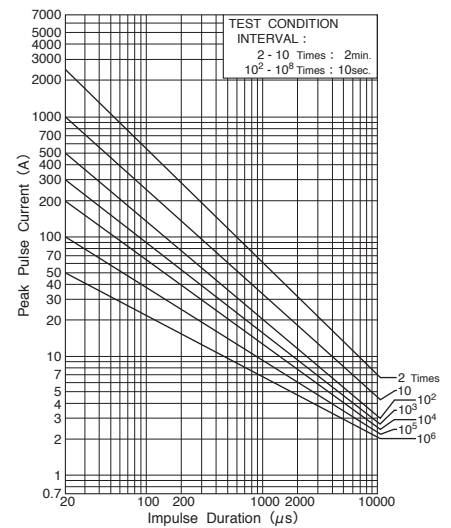

● TND23GF271K ~ TND23GF821K

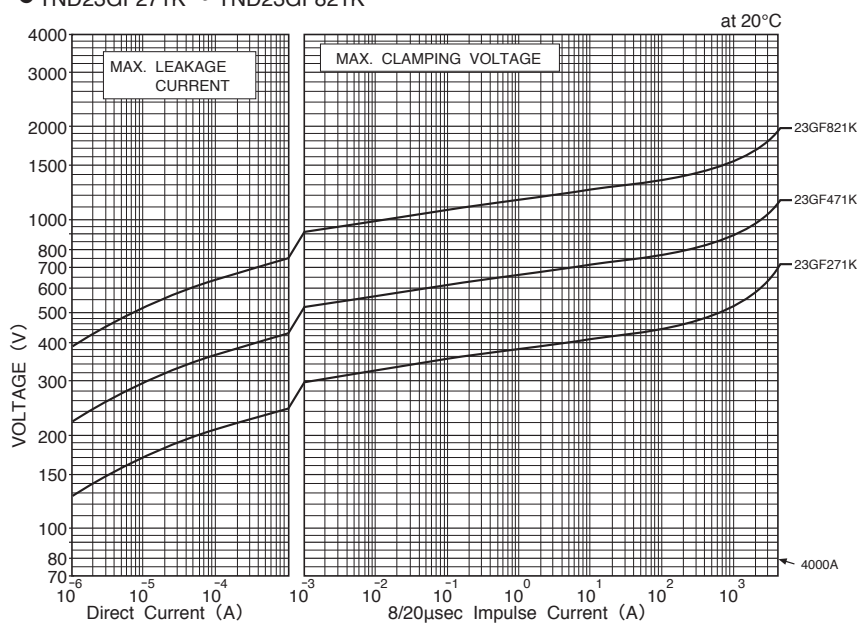

● TND23GF271K ~ TND23GF821K

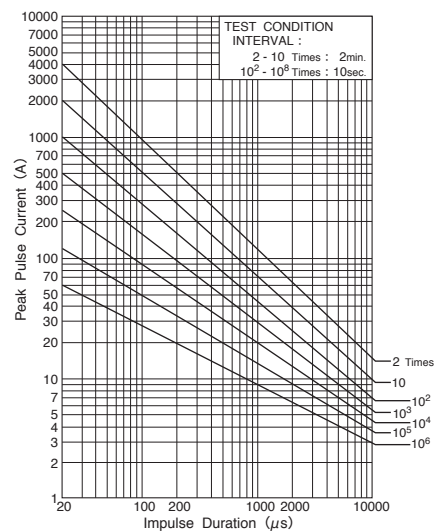



GF Series

◆GENERAL SPECIFICATIONS

Item	Test Conditions	Specifications
Standard Test Condition	20±15°C , 85%RH Max.	
Varistor Voltage	The V1 mA voltage between the two leads at 1 mA DC is quickly measured.	Satisfy the specification.
Maximum Allowable Voltage	The maximum DC voltage to be continuously applied, and the maximum sinusoidal AC voltage effective value.	
Maximum Peak Surge Current	The maximum current value if the change rate is ±10% of the varistor voltage against an initial value when the standard impulse current at 8/20 μs is applied in one direction twice within a five-minute interval.	
Energy Rating	The maximum energy if the change rate is ±10% of the varistor voltage against an initial value when a 2 ms square wave is applied once.	
Rated Wattage	The maximum electric power if the change rate of the varistor voltage is ±10% when commercial frequency AC power is applied in 85±2°C for 1000±12 hours.	
Maximum Clamping Voltage	The maximum voltage between the terminals, measured standard impulse current (8/20 μs).	Within ±0.05 % / °C
Temperature Coefficient	The varistor voltage is measured at 25±2°C and 85±2°C , and the change rate of the varistor voltage per 1°C is calculated.	
Insulation	Short circuit the two leads of the varistor, and put the varistor body into metal balls (approximately 1 mm diameter) leaving approximately 2 mm between the leads and the balls. Then, apply AC2000 Vrms between the leads and the metal balls for 60±5 seconds.	No abnormalities caused by insulation breakdown, etc.
Capacitance	The capacitance measured by 1kHz, 1 Vrms sinusoidal wave.	For reference only

Note: In DC load or unipolar surge tests, apply varistor voltage in the test voltage forward direction to measure and evaluate.
Varistor voltage change is measured after stored at Standard Test Conditions for 1 to 2 hours.

◆MECHANICAL CHARACTERISTICS

Item	Test Conditions	Specifications												
Terminal Pull Strength	Fix the unit, and gradually apply and maintain the rated tensile force to the lead wire for 10±5 seconds.(Conform to JIS C 5035) <table border="1"> <thead> <tr> <th>Type</th><th>Lead Diameter</th><th>Force</th></tr> </thead> <tbody> <tr> <td>15GF, 23GF</td><td>0.8mm</td><td>10N</td></tr> <tr> <td>Thermal fuse (15GF)</td><td>0.53mm</td><td>5N</td></tr> <tr> <td>Thermal fuse (23GF)</td><td>0.58mm</td><td>10N</td></tr> </tbody> </table>	Type	Lead Diameter	Force	15GF, 23GF	0.8mm	10N	Thermal fuse (15GF)	0.53mm	5N	Thermal fuse (23GF)	0.58mm	10N	No abnormality such as disconnection.
Type	Lead Diameter	Force												
15GF, 23GF	0.8mm	10N												
Thermal fuse (15GF)	0.53mm	5N												
Thermal fuse (23GF)	0.58mm	10N												
Terminal Bending Strength	The unit shall be secured with its terminal kept vertical and the weight specified below be applied in the axial direction. The terminal shall gradually be bent by 90° in one direction then 90° in the opposite direction, and again back to the original position. (Conform to JIS C 5035) <table border="1"> <thead> <tr> <th>Type</th><th>Lead Diameter</th><th>Force</th></tr> </thead> <tbody> <tr> <td>15GF, 23GF</td><td>0.8mm</td><td>5N</td></tr> <tr> <td>Thermal fuse (15GF)</td><td>0.53mm</td><td>2.5N</td></tr> <tr> <td>Thermal fuse (23GF)</td><td>0.58mm</td><td>5N</td></tr> </tbody> </table>	Type	Lead Diameter	Force	15GF, 23GF	0.8mm	5N	Thermal fuse (15GF)	0.53mm	2.5N	Thermal fuse (23GF)	0.58mm	5N	The leads shall not disconnect, slacken, or peel off after bending twice.
Type	Lead Diameter	Force												
15GF, 23GF	0.8mm	5N												
Thermal fuse (15GF)	0.53mm	2.5N												
Thermal fuse (23GF)	0.58mm	5N												
Vibration	Mount varistor body on vibrator, and conduct the following vibration test. Peak-to-Peak amplitude : 1.5mm, Acceleration : 5G Vibration frequency range : 10 to 500Hz Sweeping time: Approximately 20 minutes for 10Hz → 500Hz → 10Hz Direction and duration of vibration : Three directions of X, Y, and Z. 2 hours each. 6 hours total.	No remarkable appearance abnormality.												
Solderability	Each lead shall be dipped into a methanol solution (about 25%) of rosin for 5 to 10 sec. Then each lead shall be dipped into a solder. <table border="1"> <thead> <tr> <th>Solder</th><th>Pb free (Sn-3.0Ag-0.5Cu)</th><th>Eutectic (Sn/Pb)</th></tr> </thead> <tbody> <tr> <td>Solder Temp.</td><td>245±5°C</td><td>235±5°C</td></tr> <tr> <td>Dipping Time</td><td>2±0.5sec.</td><td></td></tr> <tr> <td>Dipping Depth</td><td>1.5 to 2.0mm (from the body)</td><td></td></tr> </tbody> </table>	Solder	Pb free (Sn-3.0Ag-0.5Cu)	Eutectic (Sn/Pb)	Solder Temp.	245±5°C	235±5°C	Dipping Time	2±0.5sec.		Dipping Depth	1.5 to 2.0mm (from the body)		At least, 95% of the leads shall be covered with solder uniformly.
Solder	Pb free (Sn-3.0Ag-0.5Cu)	Eutectic (Sn/Pb)												
Solder Temp.	245±5°C	235±5°C												
Dipping Time	2±0.5sec.													
Dipping Depth	1.5 to 2.0mm (from the body)													
Resistance to Soldering Heat	After V CmA is measured at room temperature, each lead shall be dipped into a solder bath at a temperature of 350±10°C to a point 2.0 to 2.5 mm from the root of the lead, and be held there for 3±1 seconds or a temperature of 260±5°C to a point 2.0 to 2.5 mm from the root of the lead, and be held there for 10±1 seconds, and then be stored at room temperature for 1 to 2 hours. Then, V CmA shall be examined. (Conform to JIS C 5102)	ΔV CmA / V CmA ≤ ±5% No remarkable damage												

◆ENVIRONMENTAL CHARACTERISTICS

Item	Test Conditions	Specifications
High Temperature Storage (Dry heat)	The specimen shall be subjected 125±2°C for 1000±12 hours without load.	ΔV CmA/V CmA ≤ ±5%
Damp heat (Humidity)	The specimen shall be subjected 40±2°C for 1000±12 hours without load.	ΔV CmA/V CmA ≤ ±5%
Temperature Cycle	The temperature cycle shown below shall be repeated 50 cycles. -40±3°C , 30 minutes ⇄ +150±2°C , 30 minutes	ΔV CmA/V CmA ≤ ±5% No remarkable damage No thermal fuse disconnection.
Damp heat Operating	The specimen shall be subjected to 40±2°C , 90 to 95%RH with the maximum allowable voltage for 1000±12 hours.	ΔV CmA/V CmA ≤ ±10%
High Temperature Operating	The specimen shall be subjected to 85±2°C with the maximum allowable voltage for 1000±12 hours.	ΔV CmA/V CmA ≤ ±10% No thermal fuse disconnection.



- Always read "Notes on Use" before using the product in order to enable you to use the product correctly and prevent any faults and accidents from occurring.
- Request the Product Specification on the product of NIPPON CHEMI-CON CORPORATION to refer to it as well as this brochure prior to the order of the products. Some specific notes on use of the ordered product may be described in the specifications.
- The products listed in this catalog are designed and manufactured for general electronics equipment use and are not intended for use in applications that can adversely affect human life; where the malfunction of equipment may cause damage to life or property. In addition, our products are not intended to be used in specific applications that may cause a major social impact. Please consult with us in advance of usage of our products in the following listed applications. ① Aerospace equipment ② Power generation equipment such as thermal power, nuclear power etc. ③ Medical equipment ④ Transport equipment (automobiles, trains, ships, etc.) ⑤ Transportation control equipment ⑥ Disaster prevention / crime prevention equipment ⑦ Highly publicized information processing equipment ⑧ Submarine equipment ⑨ Other applications that are not considered general-purpose applications.
- The circuits described as examples in this catalog and the "delivery specifications" are featured in order to show the operations and usage of our products, however, this fact does not guarantee that the circuits are available to function in your equipment systems. We are not in any case responsible for any failures or damage caused by the use of information contained herein. You should examine our products, of which the characteristics are described in the "delivery specifications" and other documents, and determine whether or not our products suit your requirements according to the specifications of your equipment systems. Therefore, you bear final responsibility regarding the use of our products.
Please make sure that you take appropriate safety measures such as use of redundant design and malfunction prevention measures in order to prevent fatal accidents and/or fires in the event any of our products malfunction.
- We strongly recommend our customers to purchase Nippon Chemi-Con products only through our official sales channels. We assume no responsibility for any defects or damages caused by using products purchased from outside our official sales channel or of counterfeit goods. In addition, we will ask the customer to pay the investigation cost for products purchased outside our official sales channel.
- We reserve the right to discontinue production and delivery of products. We do not guarantee that all the products included in this catalog will be available in the future.
The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products
- We continually strive to improve the quality and reliability of our products, but in any case that our product does not meet our published specifications, please stop using it promptly and contact us immediately. As for compensation for non-conforming goods delivered by Chemi-Con, we will limit it only to goods found in non-compliance of our published specifications. This may be accomplished by a no cost replacement of non-conforming individual products, a credit of the piece price paid per each individual non-conforming product, or in other ways deemed necessary.
In addition, we have an established system with enhanced traceability, therefore we will limit the applicable lot items for any potential compensation.

[Lead Forming Specifications](#)

[Precautions and Guidelines](#)

[Taping](#)

[Technical Terms on Varistors](#)

[Packaging • Minimum Order Quantity](#)

[Safety Standard](#)

[Technical Notes](#)