

●产品特点 (Feature)

- ☑ 耐久性: 85℃ 5,000h (叠加纹波电流)
- ☑ 电压: 400V_{dc} / 450V_{dc}
- ☑ 静电容量: 2,200μF ~ 29,000μF
- ☑ 尺寸: φ63.5×60L ~ φ100×270L
- ☑ 将RWF系列高容量化

●产品体系 (Product Chart)

- ☑ RWF, RWH ⇒ 推荐替换为RWX

*85℃5,000h系列高容量特别优化

RWF

- 高纹波电流品
- 5,600μF (450V, φ76.2×155L)
- φ50×60L ~ φ100×250L

1991 开始量产

NEW

RWX


- 小型/高容量化
- 10,000μF (450V, φ76.2×155L)
- φ63.5×60L ~ φ100×270L



2020.06 开始量产



● 产品优势 (Advantage)

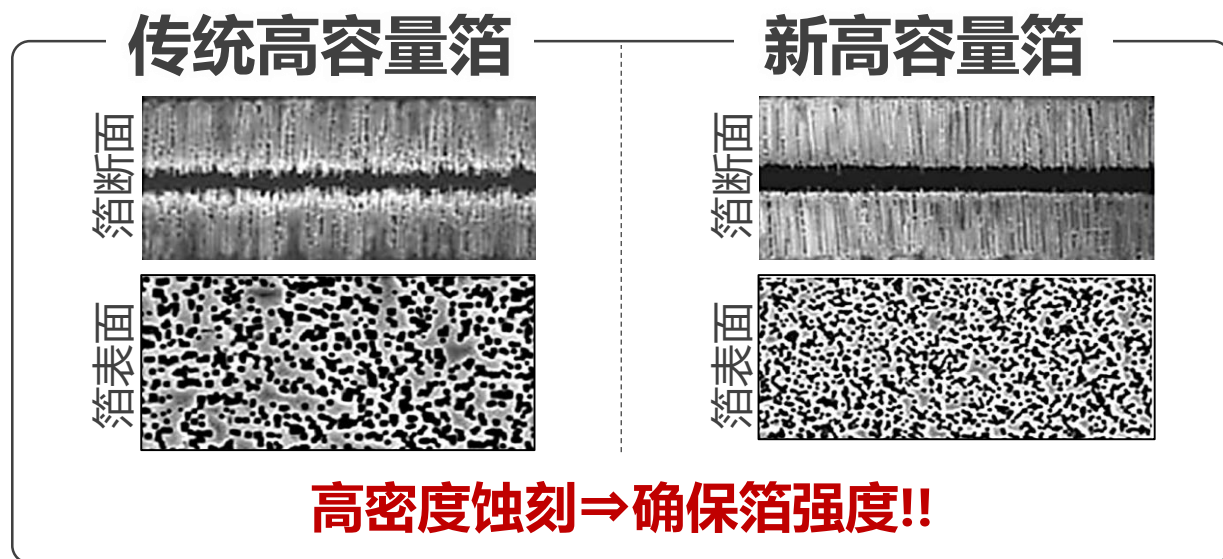

☑ RWX两大优势 (与RWF相比)



- ① 高容量化 . . . 相同尺寸, 容量更高
- ② 尺寸扩充 . . . $\phi 63.5 \times 60L \sim \phi 100 \times 270L$

传统型
RWF

【主要技术要点】

铝箔

- 充分发挥高容量铝箔的性能

电解纸

- 厚度薄/高密度电解纸


NEW
RWX

●可获得的好处 (Benefit/Evidence)

- ➡ ①高容量化 . . . “部件数量减少⇒ 小型化/轻量化”
- ②尺寸扩充 . . . “根据机器尺寸进行部件选择”




☑ L尺寸 比较 (450V10000 μ F, Φ 尺寸: Φ 89固定)

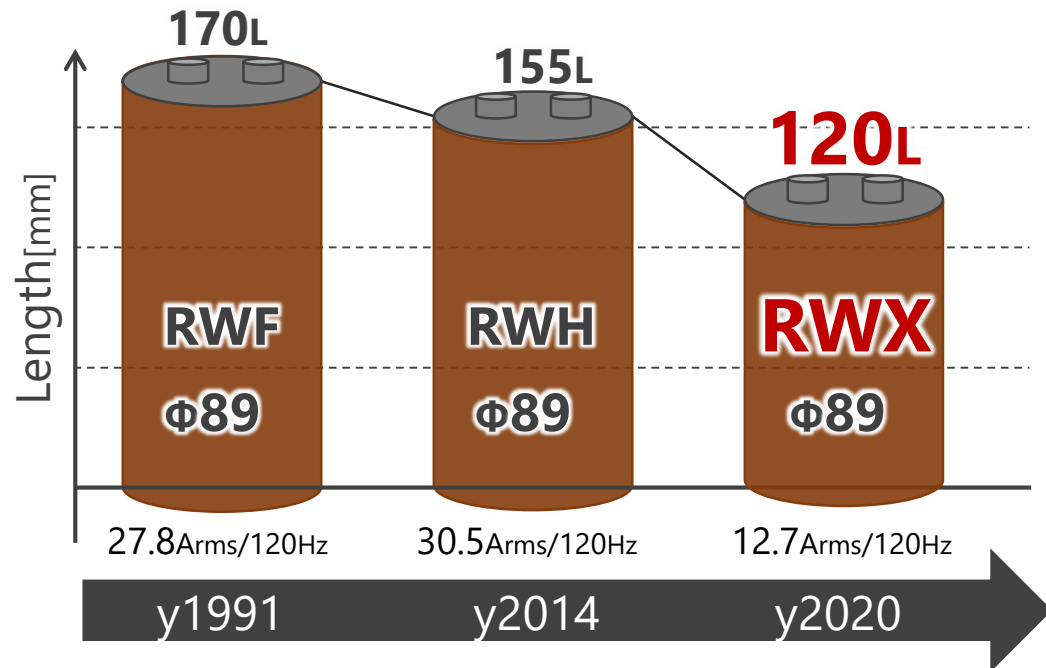

☑ 部件数量减少 (静电容量固定, 130L以下)

RWF


450V 3,300 μ F (Φ 63.5 $\times$ 130L)
11.7Arms/pc

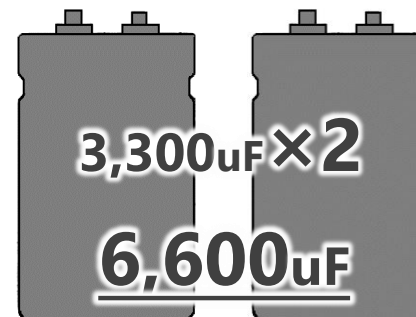

y1991

RWX

450V 6,800 μ F (Φ 76.2 $\times$ 115L)
11.9Arms/pc




y2020

●可获得的益处 (Benefit/Evidence)


- ➡ ①高容量化 . . . “部件数量减少⇒ 小型化/轻量化”
- ➡ ②尺寸扩充 . . . “根据机器尺寸进行部件选择”



☑ 静电容量 比较 (450V, $\phi 76.2 \times 115L$)

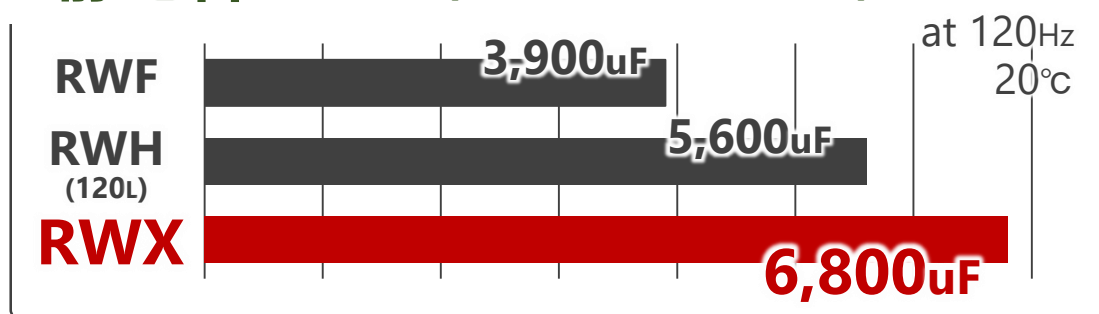

☑ 纹波电流 比较 (450V, $\phi 76.2 \times 115L$)

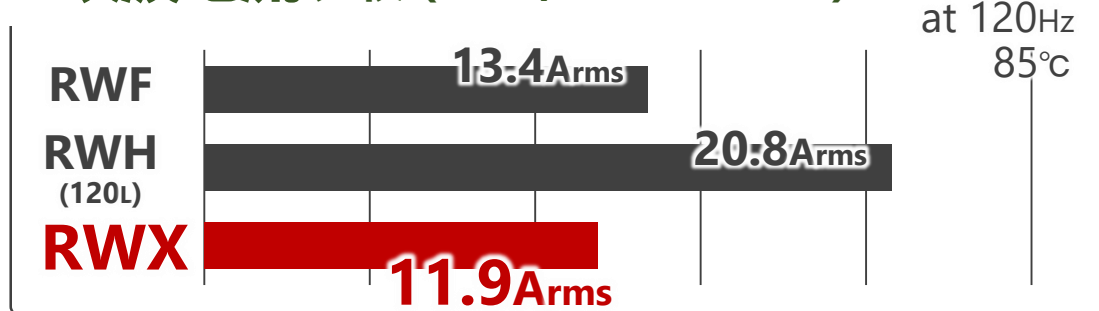

☑ 尺寸扩充 (450V)

