



NCM12-FC-127 is a color module with built-in ISP that complies with Quad VGA pixels.

It has 1280 horizontal and 960 vertical pixels and via 1/3.8" optical format.

The camera is equipped with a high-performance image processing engine, and its control software is coded in ROM,

The compact size is achieved by ROM-coding the control software.

1.Features

- Small all-in package
- HDR
- Highly sensitive
- I2C

2.Specification

• Image Sensor	1/3.8-inch CMOS color sensor
• Shutter Type	Rolling shutter
• Dimension	16 × 16 [mm] * ¹
• Effective Pixels	1280(H) × 960(V) * ²
• Pixel Size	2.9μm(H) × 2.9μm(V)
• Output Interface	Digital 8bit parallel
• Output Signal Format	YCbCr422
• Frame rate (Max.)	30fps
• Function	Auto Exposure Control, Auto White Balance, Auto Gain Control, HDR, Image Inversion (up/down, left/right), Flicker correction, etc.
• Angle of View (Typ.)	(H)127°/(V)104°/(D)147°:1280(H)x960(V) (H)127°/(V)84°/(D)139°:1280(H)x720(V)
• Optical Filter	IRCF
• F Number	F2.1
• Connection Type	FFC
• Power Consumption (Typ.)	250 [mW]

*¹ : FPC/FFC part is not included

*² : Standard output setting is 1280(H)x720(V) setting.

3. Recommended Operating Conditions

• Analog Power Supply (AVDD)	2.9 ± 0.15	[V]
• Digital Power supply (DVDD)	1.1 ± 0.1	[V]
• I/O Power supply (HVDD)	1.8 ± 0.1	[V]
• Operating Temperature	-30 ~ +80	[°C] * ³
• Storage Temperature	-40 ~ +85	[°C] * ³

*³ : No condensation

The specifications in this document are subject to change without notice for improvement.

This document does not grant any license to industrial property rights or any other rights related to the contents herein.

Reproduction or reprinting of this material without written consent of the Company is strictly prohibited.


4. Terminal Description




No	Symbol	I/O	Terminal Description	No.	Symbol	I/O	Terminal Description
1	DVDD	-	Digital power supply	12	DATA6	O	Digital data output (Data6)
2	DGND	-	Digital ground	13	DATA5	O	Digital data output (Data5)
3	PCLK	O	Data clock	14	DATA4	O	Digital data output (Data4)
4	DGND	-	Digital ground	15	DATA3	O	Digital data output (Data3)
5	HSYNC	O	Horizontal synchronous signal	16	DATA2	O	Digital data output (Data2)
6	VSYNC	O	Vertical synchronous signal	17	DATA1	O	Digital data output (Data1)
7	HVDD	-	I/O power supply	18	DATA0	O	Digital data output (Data0)
8	SDA	I/O	I2C serial data	19	AGND	-	Analog ground
9	SCL	I	I2C serial clock	20	MCLK	I	System clock
10	RESET	I	System reset	21	AGND	-	Analog ground
11	DATA7	O	Digital data output (Data7)	22	AVDD	-	Analog power supply

5. External Dimensions

[Unit : mm]

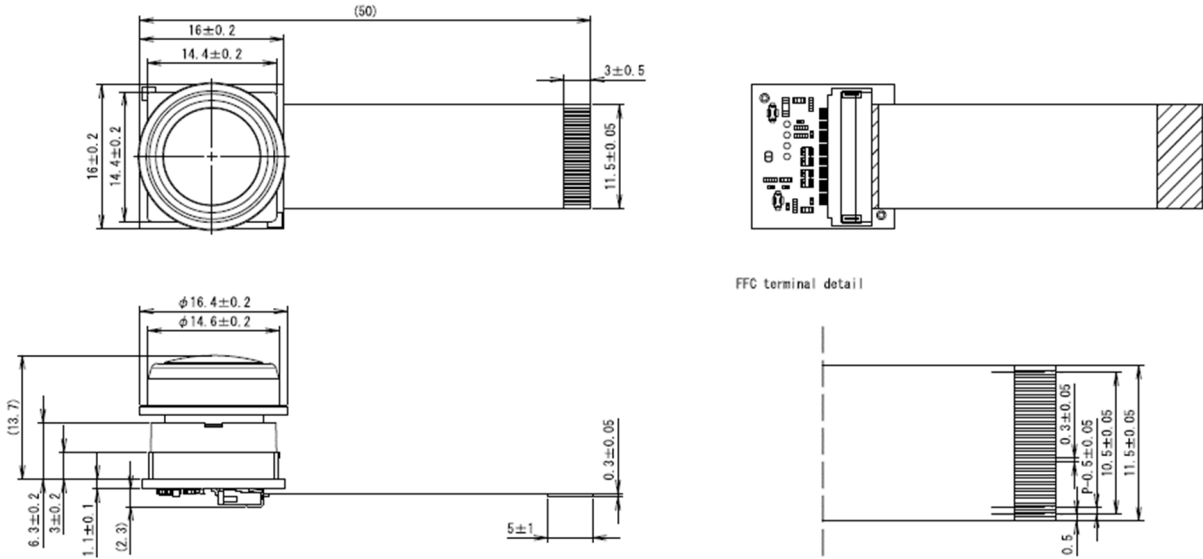

6. Image Capture Polarity

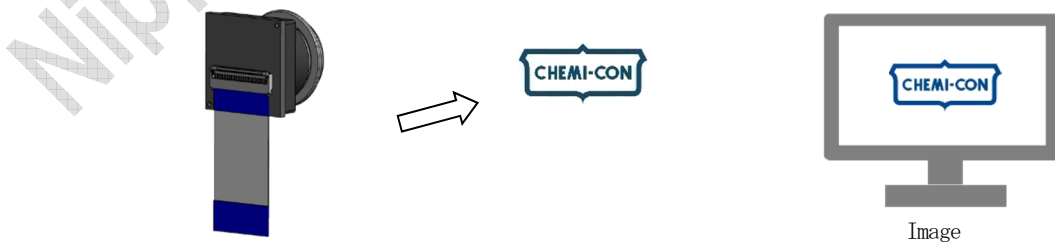

The specifications in this document are subject to change without notice for improvement.
 This document does not grant any license to industrial property rights or any other rights related to the contents herein.
 Reproduction or reprinting of this material without written consent of the Company is strictly prohibited.